



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: A61F 2/28	A1	(11) International Publication Number: WO 00/40177 (43) International Publication Date: 13 July 2000 (13.07.2000)
(21) International Application Number: PCT/US99/30414 (22) International Filing Date: 18 December 1999 (18.12.1999) (30) Priority Data: 09/225,299 05 January 1999 (05.01.1999) US 09/286,975 06 April 1999 (06.04.1999) US 09/368,263 03 August 1999 (03.08.1999) US (60) Parent Application or Grant LIFENET [/]; (). WOLFINBARGER, Lloyd, Jr. [/]; (). ANDERSON, Billy, G. [/]; (). HOPKINS, Susanne, M. ; ().	Published	

(54) Title: COMPOSITE BONE GRAFT, METHOD OF MAKING AND USING SAME
(54) Titre: GREFFE OSSEUSE COMPOSITE, PROCEDE DE FABRICATION ET D'UTILISATION DE CELLE-CI

(57) Abstract

A composite bone graft (1) for implantation in a patient, to methods of making, and using the composite bone graft along with methods for treating patients by implanting the composite bone graft at a site in a patient. The composite bone graft includes two or more connected, discrete, bone portions (2-4), and includes one or more bio-compatible connectors (7) which hold together the discrete bone portions (2-4) to form the composite bone graft (1). The composite bone graft (1) may include one or more textured bone surfaces (14b). The textured surface (14a, 14b) preferably includes a plurality of closely spaced protrusions, preferably closely spaced continuous protrusions. The composite bone graft (1) is useful for repairing bone defects caused by congenital anomaly, disease, or trauma in a patient, for example, for restoring vertical support of the anterior, and/or posterior column. Implantation of the composite bone graft results in improved graft stability, and osteo-induction ability, without a decrease in mechanical strength.

(57) Abrégé

L'invention a trait à une greffe osseuse composite (1) destinée à être implantée chez un patient, et à des procédés de fabrication et d'utilisation de la greffe osseuse composite, ainsi qu'à des méthodes permettant de traiter des patients par l'implantation de la greffe osseuse composite dans une partie du corps du patient. La greffe osseuse composite comporte deux ou davantage de parties osseuses (2-4) distinctes connectées, ainsi qu'un ou plusieurs connecteurs biocompatibles (7) qui tiennent les parties osseuses distinctes (2-4) entre elles pour former la greffe osseuse composite (1). La greffe osseuse composite (1) peut comporter une ou plusieurs surfaces osseuses texturées (14b). La surface texturée (14a, 14b) comporte de préférence plusieurs protubérances étroitement espacées, de préférence des protubérances continues étroitement espacées. La greffe osseuse composite (1) sert à réparer des défauts osseux provoqués par une anomalie congénitale, une maladie ou un traumatisme, chez un patient, par exemple, en vue de rétablir le support vertical de la colonne antérieure et/ou postérieure. L'implantation de la greffe osseuse composite entraîne une stabilité de greffe et une capacité d'induction osseuse accrues sans réduction de la résistance mécanique.

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61F 2/28	A1	(11) International Publication Number: WO 00/40177 (43) International Publication Date: 13 July 2000 (13.07.00)
(21) International Application Number: PCT/US99/30414 (22) International Filing Date: 18 December 1999 (18.12.99) (30) Priority Data: 09/225,299 5 January 1999 (05.01.99) US 09/286,975 6 April 1999 (06.04.99) US 09/368,263 3 August 1999 (03.08.99) US (71) Applicant: LIFENET [US/US]; 5809 Ward Court, Virginia Beach, VA 23455 (US). (72) Inventors: WOLFINBARGER, Lloyd, Jr.; 1509 Cedar Lane, Norfolk, VA 23508 (US). ANDERSON, Billy, G.; 1224 Heathcliff Road, Virginia Beach, VA 23464 (US). (74) Agent: HOPKINS, Susanne, M.; Lifenet, 5809 Ward Court, Virginia Beach, VA 23455 (US).		(81) Designated States: BR, CA, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: COMPOSITE BONE GRAFT, METHOD OF MAKING AND USING SAME

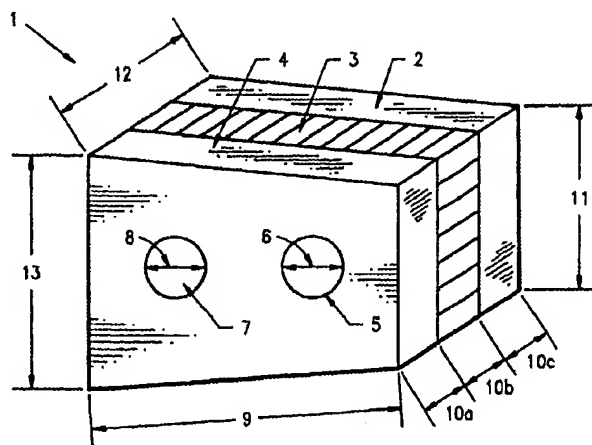

(57) Abstract

A composite bone graft (1) for implantation in a patient, to methods of making, and using the composite bone graft along with methods for treating patients by implanting the composite bone graft at a site in a patient. The composite bone graft includes two or more connected, discrete, bone portions (2-4), and includes one or more bio-compatible connectors (7) which hold together the discrete bone portions (2-4) to form the composite bone graft (1). The composite bone graft (1) may include one or more textured bone surfaces (14b). The textured surface (14a, 14b) preferably includes a plurality of closely spaced protrusions, preferably closely spaced continuous protrusions. The composite bone graft (1) is useful for repairing bone defects caused by congenital anomaly, disease, or trauma in a patient, for example, for restoring vertical support of the anterior, and/or posterior column. Implantation of the composite bone graft results in improved graft stability, and osteo-induction ability, without a decrease in mechanical strength.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

5

COMPOSITE BONE GRAFT, METHOD OF MAKING AND USING SAME

10

This application is a Continuation-in-Part application of United States Patent Application Serial No: 09/286,975, filed April 6, 1999, which is a Continuation-in-Part of United States Patent Application Serial No: 09/225,299, filed January 5, 1999, now pending.

15

FIELD OF THE INVENTION

20

The invention relates to bone grafts and more particularly, to bone grafts useful for spinal fusion. The invention provides a composite bone graft for implantation in a patient, and methods of making and using the composite bone graft. The composite bone graft contains two or more distinct bone portions where the bone portions are connected. The bone portions are preferably self-locking, interlocking, and/or connected by at least one mechanical connector, including for example, a bone pin. One or more of the bone portions may be demineralized, and may also be continuous or discontinuous. The composite bone graft may include one or more textured surfaces, preferably including a plurality of closely spaced protrusions. The composite bone graft is useful for repairing bone defects caused by congenital anomaly, disease, or trauma, and is particularly useful for spinal fusions. The composite bone graft can be appropriately sized for any application and can be used to replace traditional non-bone prosthetic implants. The composite bone graft promotes the growth of patient bone at an implantation site by promoting osteoinductivity and cellularization, provides added stability and mechanical strength, and does not shift, extrude or rotate, after implantation.

25

30

35

40

45

BACKGROUND OF THE INVENTION

50

In the field of prosthetic implants, materials often used include bone grafts and implants produced from non-bone materials, including for example stainless steel, titanium and plastics. The

55

5 choice of whether to use a bone or a non-bone implant often depends on the clinical indication,
10 implant site, whether the implant is load-bearing, and the size of the implant needed.

15 Prior to the present invention, the use of bone grafts versus non-bone prosthetic implants to
for example, support and fuse together adjacent vertebrae, has been limited in part by the physical
size of a cortical bone graft. Interbody bone grafting involves the problem of strength. Strong
cortical bone (the outer layer) is required as a strut in the interbody position to prevent collapse of
the disc space while healing occurs. For example, cortical bone obtained from a cadaver source
20 fashioned into struts, is not wide enough for optimum load bearing. This natural limitation often
excludes the use of a bone graft product.

25 The success or failure of a bone graft further depends on whether the bone graft remains at
the implant site, is cellularized, and whether it can withstand the mechanical load. In spinal surgery,
there are two primary indications for use of allograft bone: (1) when there is insufficient available
autograft bone, and (2) in spinal fusion procedures when a structural element is needed. Typically,
bone grafts are affixed at an implant site by fusion. Bone grafts for spinal applications often fail
because they are extruded from the implantation site due to shifting, rotation, and slippage of the
35 graft, are not cellularized, or fail mechanically.

40 The invention enables the use of bone grafts for applications normally suited for only non-
bone prosthetic implants. The invention solves the problem of graft failure by providing a composite
bone graft which can be appropriately sized for any application out of for example, strong cortical
bone; promotes the ingrowth of patient bone at an implantation site by promoting osteoinductivity
45 and cellularization; provides added stability and mechanical strength; and does not shift, extrude or
rotate; after implantation.

5

10

NOT FURNISHED UPON FILING

15

20

25

30

35

40

45

50

55

5

10

NOT FURNISHED UPON FILING

15

20

25

30

35

40

45

50

55

5

10

NOT FURNISHED UPON FILING

15

20

25

30

35

40

45

50

5

55

5
10
15
20
25
OpteoForm™ produced by the University of Florida; OsteoFill™ produced by the University of Florida; and growth factors including for example, bone morphogenic protein, and transforming growth factor- β . Suitable osteoconductive substances include but are not limited to, for example, hydroxyapatite; collagen; any biocompatible matrix material including for example, polymeric matrix materials, bioglass, bioceramics, resorbable Biomaterials; bioabsorbable polymers; a plastic matrix; stainless steel; titanium; cobalt-chromium-molybdenum alloy matrix; and substances including hydroxyapatite, including for example, Osteoset™ produced by Wright Medical. Suitable pharmaceutically active agents include but are not limited to, for example, growth factors including for example bone growth factors including for example bone morphogenic protein, and transforming growth factor- β , chemotherapeutic agents, anti-inflammatory agents, and antibiotics.

30
35
The invention also provides a composite bone graft, including a first cortical bone portion, a second cortical bone portion, a cancellous bone portion disposed between the first cortical bone portion and the second cortical bone portion to form a graft unit, and one or more biocompatible connectors for holding together the graft unit, where the cancellous bone portion is demineralized and discontinuous.

40
45
The invention provides a composite bone graft, including a first cortical bone portion, a second cortical bone portion, and a third cortical bone portion disposed between the first cortical bone portion and the second cortical bone portion to form a graft unit, and one or more biocompatible connectors for holding together the graft unit, where the third cortical bone portion is demineralized and discontinuous.

50
The invention provides a composite bone graft, including a first cortical bone portion, and a second cortical bone portion disposed apart from each other, and forming a graft unit, and one or

5 more biocompatible mechanical connectors for holding together the graft unit, where the first and
10 second cortical bone portions are disposed separate from each other by the biocompatible mechanical
connectors, thereby forming a substantially void central area.

15 The invention further provides a composite bone graft including a substantially void central
area, where the substantially void central area further includes one or more therapeutically beneficial
substances including but not limited to, for example, one or more of the following: osteoinductive
substances, osteoconductive substances, and pharmaceutically active agents. Such therapeutically
20 beneficial substances may optionally be provided with a carrier. Suitable osteoinductive substances
include but are not limited to, for example, autograft bone; allograft bone; Grafton™ produced by
Osteotech; DynaGraft™; demineralized cortical bone; demineralized cancellous bone; collagen
25 including one or more growth factors including for example Novus™ produced by Stryker Biotech;
collagen including demineralized bone including for example DynaGraft™; cancellous bone; cortical
bone; OpteoForm™ produced by the University of Florida; OsteoFill™ produced by the University
of Florida; and growth factors including for example bone morphogenic protein, and transforming
30 growth factor- β . Suitable osteoconductive substances include but are not limited to, for example,
hydroxyapatite; collagen; any biocompatible matrix material including for example, polymeric
matrix materials, bioglass, bioceramics, resorbable Biomaterials; bioabsorbable polymers; a plastic
matrix; stainless steel; titanium; cobalt-chromium-molybdenum alloy matrix; and substances
35 including hydroxyapatite, including for example, Osteoset™ produced by Wright Medical. Suitable
pharmaceutically active agents include but are not limited to, for example, growth factors including
for example bone growth factors including for example bone morphogenic protein, and transforming
growth factor- β ; chemotherapeutic agents; anti-inflammatory agents; and antibiotics. The material

5
may be in any suitable form including for example, in the form of a solid, sponge, paste, powder,
and/or gel.

10
The invention further provides a composite bone graft where the biocompatible connectors
include one or more mechanical biocompatible connectors.

15
The invention provides a composite bone graft where the biocompatible connectors include
a chemical biocompatible connector.

20
The invention further provides a composite bone graft where the mechanical biocompatible
connectors include one or more pins.

25
The invention further provides a composite bone graft where the chemical biocompatible
connectors include a biocompatible adhesive.

30
The invention provides a composite bone graft where one or more biocompatible connectors
include one or more of the following: a mechanical connector and a chemical connector.

35
The invention also provides a composite bone graft where the mechanical biocompatible
connectors include one or more of the following biocompatible materials: cortical bone; stainless
steel; titanium; cobalt-chromium-molybdenum alloy; a bioceramic; a bioglass; a plastic of one or
more of the following: nylon, polycarbonate, polypropylene, polyacetal, polyethylene, and
polysulfone; and one or more bioabsorbable polymers.

40
The invention also provides a composite bone graft where the mechanical biocompatible
connectors include cortical bone.

45
The invention provides a composite bone graft where the one or more pins include one or
more cortical bone pins.

5

The invention provides a composite bone graft where the graft unit includes one or more through-holes configured to accomodate the one or more pins.

10

The invention further provides a composite bone graft where the through-holes are disposed perpendicular to interfaces of bone portions forming the graft unit.

15

The invention further provides a composite bone graft where the through-holes are disposed perpendicular to interfaces of for example, the first bone portion, the second bone portion, and the third bone portion, of the graft unit.

20

The invention provides a composite bone graft where the one or more pins and the one or more through-holes are configured to provide an interference fit tor holding together the graft unit.

25

The invention also provides a composite bone graft where the one or more through-holes and the one or more pins are round and an inner diameter of a through-hole is smaller than a diameter of a pin, to provide an interference fit between the through-hole and the pin.

30

The invention further provides a composite bone graft where the one or more cortical bone pins include a plurality of vertical groves provided on a surface thereof.

35

The invention further provides a composite bone graft where the one or more cortical bone pins includes a roughened surface.

40

The invention provides a composite bone graft where the one or more cortical bone pins further includes a slot extending from one end of the bone pin.

45

The invention provides a composite bone graft where the one or more pins is threaded to provide a threaded engagement with the one or more through-holes.

50

55

5

10

The invention further provides a composite bone graft where the one or more pins is threaded and the one or more through-holes is threaded, to provide a threaded engagement between the one or more pins and the one or more through-holes.

15

The invention provides a composite bone graft where the one or more pins and the one or more through-holes are configured to provide a slidable connection, for example, to provide a composite bone graft including a substantially void central area.

20

The invention also provides a composite bone graft where a cross-section of the one or more pins includes a shape selected from the group including the following: round, ovoid, square, rectangular, triangular, pentagon, hexagon, and trapezoidal.

25

The invention further provides a composite bone graft including a plurality of plate-like cortical bone portions, the cortical bone portions layered to form a graft unit, the graft unit held together with one or more cortical bone pins.

30

The invention further provides a composite bone graft where the composite bone graft is a cortical cylinder.

35

The invention provides a composite bone graft including a graft unit having one or more through-holes configured to accommodate one or more pins, the graft unit including two or more bone portions layered to form the graft unit, and one or more pins for holding together the graft unit.

40

45

The invention further provides a composite bone graft, including a graft unit having one or more through-holes configured to accommodate one or more pins, the graft unit including a first plate-like cortical bone, a second plate-like cortical bone, a plate-like cancellous bone disposed between the first plate-like cortical bone and the second plate-like cortical bone to form the graft unit, and one or more cortical bone pins for holding together the graft unit.

50

10

55

5

10

The invention also provides a composite bone graft, including a graft unit having one or more through-holes configured to accomodate one or more pins, the graft unit including a first plate-like bone, a second plate-like bone provided on the first plate-like bone to form the graft unit, and one or more bone pins for holding together the graft unit.

15

20

25

The invention also provides a cervical composite bone graft, including a flattened curved wedge graft unit having one or more through-holes configured to accomodate one or more pins, the graft unit including two or more plate-like cortical bone portions layered to form the graft unit, and at least two bone pins for holding together the graft unit, where the graft unit includes a substantially centrally located through-hole. The diameter of the through-hole may be readily selected by one of ordinary skill in the art without undue experimentation depending upon the particular application; for example, the diameter of the through-hole may be from about 2.0 mm-4.0 mm; preferably 2.5 mm-3.0 mm; and more preferably 3.0 mm.

30

The invention also provides a composite bone graft where the one or more through-holes are disposed perpendicular to interfaces of plate-like bones of the graft unit.

35

40

The invention provides a composite bone graft where the composite bone graft is a parallelepiped; a parallel block; a square block; a trapezoid wedge; a cylinder; a tapered cylinder; a cervical wedge (flattened curved wedge); an ovoid wedge (anterior lumbar wedge graft) and a polyhedron.

45

The invention further provides a composite bone graft where the composite bone graft is a polyhedron including six planer surfaces.

50

The invention provides a composite bone graft where the composite bone graft further includes one or more textured surfaces.

55

5

The invention also provides a composite bone graft where the one or more textured surfaces includes a plurality of closely spaced continuous protrusions.

10

The invention provides a composite bone graft where the continuous protrusions include a cross-section having one or more shapes selected from the following: irregular; triangular, square, rectangular, and curved.

15

The invention further provides a composite bone graft where the plurality of continuous protrusions are sized to be in a range of greater than or equal to about 1.5 mm in length; 0.5 to about 10.0 mm in width and 0.1 to about 5.0 mm in depth.

20

The invention provides a composite bone graft where the plurality of closely spaced continuous protrusions are spaced from about 0.0 to about 3.0 mm apart.

25

The invention provides a composite bone graft where the plurality of protrusions are spaced from about 0.1 to about 2.0 mm apart.

30

The invention also provides a composite bone graft where the plurality of protrusions are spaced about 0.5 mm apart.

35

The invention provides a method for restoring vertical support of the posterior and/or anterior column by implanting a composite bone graft including two or more distinct bone portions held together by one or more connectors, at a site in a patient.

40

The invention provides a composite bone graft containing two or more connected bone portions, where the composite bone graft has a plurality of closely spaced protrusions on one or more surfaces thereof, where the protrusions are continuous protrusions, discrete protrusions, or a combination thereof.

45

50

55

5

The invention provides a composite bone graft where the plate-like cortical and/or cancellous bone portions are continuous bone portions and/or discontinuous bone portions.

10

The invention provides a composite bone graft including one or more discontinuous bone portions.

15

The invention provides a composite bone graft including one or more discontinuous, demineralized cortical bone portions.

20

The invention provides a composite bone graft including one or more discontinuous, demineralized cancellous bone portions.

25

The invention further provides a composite bone graft where one or more continuous or discontinuous cancellous bone portions, (continuous or discontinuous and/or demineralized) includes one or more therapeutically beneficial substances including but not limited to, for example, one or more of the following: osteoinductive substances, osteoconductive substances, and pharmaceutically active agents. Such therapeutically beneficial substances may optionally be provided with a carrier. Suitable osteoinductive substances include but are not limited to, for example, autograft bone; allograft bone; Grafton™ produced by Osteotech; DynaGraft™; demineralized cortical bone; demineralized cancellous bone; collagen including one or more growth factors including for example Novus™ produced by Stryker Biotech; collagen including demineralized bone including for example DynaGraft™; cancellous bone; cortical bone; OpteoForm™ produced by the University of Florida; OsteoFill™ produced by the University of Florida; and growth factors including for example bone morphogenic protein, and transforming growth factor-β. Suitable osteoconductive substances include but are not limited to, for example, hydroxyapatite; collagen; any biocompatible matrix material including for example, polymeric matrix materials, bioglass, bioceramics, resorbable

30

35

40

45

50

55

5

10

15

Biomaterials; bioabsorbable polymers; a plastic matrix; stainless steel; titanium; cobalt-chromium-molybdenum alloy matrix; and substances including hydroxyapatite, including for example, Osteoset™ produced by Wright Medical. Suitable pharmaceutically active agents include but are not limited to, for example, growth factors including for example bone growth factors including for example bone morphogenic protein, and transforming growth factor- β ; chemotherapeutic agents; anti-inflammatory agents; and antibiotics.

20

The invention provides a composite bone graft where one or more continuous or discontinuous cancellous bone portions are demineralized and include one or more therapeutically beneficial substances.

25

The invention provides a composite bone graft where one or more discontinuous cortical bone portions, include one or more therapeutically beneficial substances.

30

The invention further provides a composite bone graft where one or more discontinuous cortical bone portions are demineralized and include one or more therapeutically beneficial substances.

35

40

The invention also provides a composite bone graft including a two or more distinct bone portions held together by one or more connectors, where the composite bone graft includes two diametrically opposing chamfered edges, one provided along the length of the graft at its top edge and the other provided along the length of the graft at its bottom edge, such that the chamfered edges are diametrically opposing.

45

The invention further provides a composite bone graft including two or more distinct interlocking cortical bone portions.

50

55

5

The invention provides a composite bone graft including two or more distinct interlocking bone portions, where the interlocking bone portions are self-locking.

10

The invention also provides a composite bone graft including two or more distinct interlocking bone portions, where the interlocking bone portions are locked with one or more locking pins.

15

The invention further provides a composite bone graft where bone portions are locked with one or more locking pins entirely or partially traversing a dimension of the composite bone graft.

20

The invention provides an interlocking composite bone graft where each complementary bone portion is provided with a discrete or continuous interlocking pattern.

25

The invention also provides an interlocking composite bone graft including two or more distinct adjacent bone portions where adjacent bone portions are configured to interlock with each other, and one or more bone pins partially or entirely traversing a dimension of the graft, where the dimension of the graft is the length, width, or height of the graft.

30

The invention provides an interlocking composite bone graft including two or more distinct adjacent bone portions where adjacent bone portions are configured to interlock with each other.

35

The invention provides a composite bone graft including two or more distinct adjacent interlocking bone portions where adjacent bone portions include complementary peg-like protrusions and corresponding depressions, such that the protrusions and depressions provide an interlocking fit between the bone portions.

40

45

50

15

SUBSTITUTE SHEET (RULE 26)

55

5

BRIEF DESCRIPTION OF THE DRAWINGS

10

Figure 1. Figure 1 illustrates a perspective view of a trapezoid wedge composite bone graft having a non-textured surface.

15

Figure 2. Figure 2 illustrates a side view of a trapezoid wedge composite bone graft having opposing textured surfaces provided perpendicular to the interfaces of the bone portions. The textured surfaces illustrate continuous linear protrusions defining a saw-tooth-like pattern.

20

Figure 3. Figure 3 illustrates a cross-section posterior view of the trapezoid wedge composite bone graft of figure 2.

25

Figure 4. Figure 4 illustrates a cross-section anterior view of the trapezoid wedge composite bone graft of figure 2.

30

Figure 5. Figure 5 illustrates a top view of the trapezoid wedge composite bone graft of figure 2, and having a textured surface.

35

Figure 6. Figure 6 is a perspective view of the trapezoid wedge composite bone graft of figure 2, and having a textured surface.

40

Figure 7. Figure 7 illustrates a perspective of a preferred slidably connected composite bone graft having a first cortical bone portion, a second cortical bone portion, cortical bone pins, through-holes, and a centrally located void.

45

Figure 8. Figure 8 illustrates a top view of the slidably connected composite bone graft of figure 7, having a first cortical bone portion, a second cortical bone portion, and a cancellous bone portion disposed there between.

50

55

5

Figure 9. Figure 9 illustrates a perspective view of a preferred embodiment of the composite bone graft.

10

Figure 10. Figure 10 illustrates a preferred cortical dowel composite bone graft including a plurality of cortical bone portions connected by a single cortical bone pin inserted into a through-hole.

15

Figure 11A. Figure 11A illustrates the method of making a preferred embodiment of the composite bone graft.

20

Figure 11B. Figure 11B illustrates a method for producing bone pins and producing a pinned graft unit.

25

Figure 12. Figure 12 illustrates another method for making a composite bone graft.

Figures 13A & 13B. Figure 13A is a perspective view of a preferred trapezoid block composite bone graft having opposing textured surfaces; Figure 13B is a detail of the protrusions of the textured surface.

30

Figures 14A, 14B & 14C. Figures 14A, 14B and 14C, illustrate a cervical wedge (flattened curved wedge) composite bone graft for use in cervical fusions where 14A is a perspective standing view, 14B is a side view, and 14C is a perspective view where the graft is provided with opposing textured surfaces.

35

Figure 15. Figure 15 illustrates a method for making a cervical wedge composite bone graft for use in cervical fusions.

40

Figure 16. Figure 16 illustrates a perspective view of a mechanical pin connector having a slot extending from its lower end.

45

50

55

5

Figure 17. Figure 17 illustrates a side view of the mechanical pin connector of figure 16, having a slot extending from its lower end.

10

Figure 18. Figure 18 illustrates a cross-section view of the mechanical pin connector of figure 16, having a slot extending from its lower end.

15

Figure 19. Figure 19 illustrates a perspective view of a mechanical pin connector having a plurality of horizontally disposed grooves.

20

Figure 20. Figure 20 illustrates a perspective view of a mechanical pin connector having helical threads.

25

Figure 21. Figure 21 illustrates a perspective view of a mechanical pin connector having a plurality of vertically disposed grooves.

Figure 22. Figure 22 illustrates a perspective view of a mechanical slotted pin connector.

30

Figure 23. Figure 23 illustrates a perspective view of a mechanical pin connector having a plurality of horizontally disposed ridges.

35

Figure 24. Figure 24 illustrates a perspective view of a mechanical triangular pin connector.

Figure 25. Figure 25 illustrates a perspective view of a mechanical square pin connector

40

Figure 26. Figure 26 illustrates a perspective view of a mechanical hexagon pin connector.

45

Figure 27. Figure 27 illustrates a perspective view of a rectangular block composite bone graft having a demineralized cortical bone portion sandwiched between two cortical bone portions, where the demineralized cortical bone portion is provided with perforations and channels, and where the composite graft

50

55

5

10

includes opposing textured surfaces provided perpendicular to the interfaces of the bone portions. The textured surfaces illustrate continuous linear protrusions defining a saw-tooth-like pattern.

15

Figure 28. Figure 28 illustrates a perspective view of a rectangular block composite bone graft having a demineralized cancellous bone portion sandwiched between two cortical bone portions, where the composite graft includes opposing textured surfaces provided perpendicular to the interfaces of the bone portions. The textured surfaces illustrate continuous linear protrusions defining a saw-tooth-like pattern.

20

25

Figure 29. Figure 29 illustrates a preferred method of making the bone graft of Figure 27.

30

Figure 30. Figure 30 illustrates a preferred method of making the bone graft of Figure 28.

35

Figure 31A. Figure 31A illustrates a top view of a composite bone graft including a void disposed between two cortical bone portions where the void includes one or more therapeutically beneficial substances. Figure 31B illustrates a perspective view of a composite bone graft including a void disposed between two cortical bone portions where the void includes one or more therapeutically beneficial substances, and the composite graft includes opposing textured surfaces.

40

45

50

55

5

10

Figure 32A, 32B, & 32C. Figures 32A, 32B, and 32C, illustrate a top view, a cross-section, and a side view, respectively, of a preferred parallel block composite bone graft.

15

Figure 33A, 33B, & 33C. Figures 33A, 33B, and 33C, illustrate a top view, a cross-section, and a side view, respectively, of a preferred trapezoid wedge composite bone graft.

20

Figure 34. Figure 34 illustrates a perspective view of a preferred trapezoid wedge composite bone graft having opposing textured surfaces and having a horizontally disposed channel and vertically disposed canals.

25

Figures 35A & 35B. Figure 35A illustrates a standing view of a preferred cervical wedge composite bone graft for use in cervical fusions, having horizontally disposed channels and having a centrally located through-hole including an osteoconductive substance. Figure 35B illustrates a side view of the cervical wedge graft of Fig. 35A including a vertically disposed channel.

30

35

Figures 36A, 36B, & 36C. Figures 36A, 36B, and 36C, illustrate a cross-section, a top view, and a side view, respectively, of a preferred trapezoid wedge composite bone graft.

40

Figure 37. Figure 37 illustrates a standing view of a cervical wedge (flattened curved wedge) composite bone graft for use in cervical fusions.

45

Figure 38. Figure 38 illustrates a standing view of a cervical wedge (flattened curved wedge) composite bone graft for use in cervical fusions.

50

20

SUBSTITUTE SHEET (RULE 26)

55

5

Figures 39. Figure 39 illustrates a perspective view of a preferred embodiment of the composite bone graft including two interlocking cortical bone portions.

10

Figures 40A & 40B. Figure 40A illustrates a side view of a preferred embodiment of a cervical wedge composite bone graft including two interlocking cortical bone portions, and figure 40B illustrates a perspective view of the graft including two interlocking cortical bone portions.

15

Figure 41. Figure 41 illustrates a perspective view of a preferred trapezoid wedge bone graft including three interlocking cortical bone portions.

20

Figures 42A, 42B, & 42C. Figures 42A, 42B, & 42C illustrate side views of preferred composite bone grafts including two interlocking cortical bone portions where the interlocking interface defines a sawtooth pattern, a stepped pattern and a lock & key pattern, respectively.

25

Figure 43. Figure 43 illustrates a standing view of a cervical wedge (flattened curved wedge) composite bone graft for use in cervical fusions.

30

Figure 44. Figure 44 illustrates a standing view of a cervical wedge (flattened curved wedge) composite bone graft for use in cervical fusions.

35

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

40

I. Definitions:

The below definitions serve to provide a clear and consistent understanding of the specification and claims, including the scope to be given such terms.

45

50

55

5

10

15

20

25

30

35

40

45

50

55

Bioabsorbable polymers. By the term "bioabsorbable polymers" is intended for the purposes of the present invention, bioresorbable, bioabsorbable, biodegradable, and bioerodible materials that are well known to those of ordinary skill in the art and are described in *Biomaterials Science-An Introduction to Materials in Medicine*, edited by Ratner, B. D. et al., Academic Press, (1996), and include for example, the following materials: chitosan; isomorphous poly(hexamethylene co-trans-1,4-cyclohexane dimethylene oxalates); poly(glycolic acid); copolymers of poly(glycolic acid) and poly(lactic acid); polydioxanone; poly(lactic acid); polymers having a back-bone structure selected from the group consisting of: polyanhydrides, polyphosphazenes, polyphosphonates, polyamides, and polyiminocarbonates; polyhydroxybutyrate; polyhydroxyvalerate; copolymers of polyhydroxybutyrate and polyhydroxyvalerate; polycaprolactone; polydioxanone; poly(γ -ethyl glutamate); poly(DTH iminocarbonate); poly(Bisphenol A iminocarbonate); poly(DETOSU-1,6 HD-t-CDM ortho ester); poly(Sebacic acid-hexadecandioic acid anhydride); poly(ortho esters); poly(amino acids); and PLOA. Such polymers may optionally include one or more pharmaceutically active agents for controlled release applications, such agents including for example: osteoinductive factors including for example bone morphogenic protein; growth factors including for example transforming growth factor- β ; chemotherapeutic agents; antibiotics; and anti-inflammatory agents.

Biocompatible. By the term "biocompatible" is intended for the purposes of the present invention, any material which when implanted in a patient does not provoke an adverse response in the patient. A suitable biocompatible material when introduced into a patient is not toxic or injurious to that patient, or does not cause immunological rejection.

5

10

Biomechanical strength. By the term "biomechanical strength" is intended for the purposes of the present invention, those properties exhibited by a bone graft, including loading strength, compressive strength, and tensile strength.

15

20

25

30

35

40

45

50

Bone. By the term "bone" is intended for the purposes of the present invention, bone recovered from any source including animal and human, for example, human bone recovered for the production of allografts, and animal bone recovered for the production of xenografts, such allografts and xenografts suitable for implantation into a human. Such bone includes: any bone or portion thereof, including cut pieces of bone, including cortical and/or cancellous bone, for example, recovered from a human including a living human or a cadaver, or animal, and processed for implantation into a living patient. Such bones including for example: the humerus, hemi-pelvi, tibia, fibula, radius, ulna, rib, vertebrae, mandibular, femur, and ilia, and any cut portion thereof. Such bone may be demineralized or not demineralized. In a preferred embodiment a cancellous or cortical bone section is demineralized and disposed between two non-demineralized cortical bone portions. Suitable bone may also include continuous or discontinuous bone portions. For example, one or more bone portions of a composite bone graft may be discontinuous, for example, a bone portion may be perforated and demineralized, for example perforated either before or after demineralization, for example, to allow for uniform demineralization (perforations before demineralization) and to promote ingrowth of patient bone. Cancellous and/or demineralized cancellous and/or discontinuous cancellous and/or demineralized discontinuous cancellous and or discontinuous cortical and/or demineralized discontinuous cortical, bone, may optionally include one or more therapeutically beneficial substances provided with or without a carrier. transforming growth factor- β ; The composite bone graft may include a substantially void central area, where the

55

5 substantially void central area further includes one or more therapeutically beneficial substances
provided with or without a carrier. The material may be in any suitable form including for example,
10 in the form of a solid, sponge, paste and/or gel.

Bone marrow elements. By the term "bone marrow elements" is intended for the purposes
15 of the present invention, the highly cellular hematopoietic connective tissue filling the medullary
cavities and spongy epiphysis of bones which may harbor bacterial and/or viral particles and/or
fungal particles, and includes for example, blood and lipid.

20 *Chamfer.* By the term "chamfer" is intended for the purposes of the invention, an oblique
face formed at a corner of a composite bone graft, at an angle to the adjacent principal faces.
Suitable angles include angles in the range of from 38° to 52°, more preferably 40° to 50°, even
25 more preferably 42° to 48°, and most preferably about 45°.

30 *Cleaned bone.* By the term "cleaned bone" is intended for the purposes of the present
invention, a bone or cut portion thereof, that has been processed using means known in the art, to
remove bone marrow elements.

35 *Closely Spaced.* By the term "closely spaced" is intended for the purposes of the present
invention, protrusions (discrete or continuous) which are in close proximity to each other. Preferably
the protrusions are spaced no more than 3.0mm apart (i.e. the distance between the edges of two
40 adjacent protrusions), more preferably no more than 2.0mm apart, even more preferably no more
than 1.5mm apart, and most preferably about 0.5mm apart

45 *Composite.* By the term "composite" is intended for the purposes of the present invention,
a bone graft which is made up of two or more distinct bone portions.

5

10

15

20

25

30

35

40

45

50

Connector. By the term "connector" is intended for the purposes of the present invention, a means of connecting two or more distinct bone portions, including for example a chemical and/or mechanical means. By the term "mechanical connector" is intended for the purposes of the present invention, a structural member including for example, a pin. By the term "chemical connector" is intended for the purposes of the present invention, a biocompatible composition including for example, one or more biocompatible adhesives and one or more surface modification agents and methods.

Continuous Bone Portion. By the term "continuous bone portion" is intended for the purposes of the present invention, a bone portion that is substantially solid without any artificial void areas.

Continuous Protrusion. By the term "continuous protrusion" is intended for the purposes of the present invention, a protrusion whose length continues substantially uninterrupted, including for example a linear or curved protrusion whose length is at least three times greater than its width, preferably at least five times greater, and includes for example a continuous, protruding concentric ring, and a continuous linear protrusion, for example, as illustrated in Fig 2. Each continuous protrusion may or may not be distinct from another continuous protrusion.

Demineralized Bone. By the term "demineralized bone" is intended for the purposes of this invention, one or more distinct bone portions which have been demineralized by any method well known to those of ordinary skill in the art. Cortical bone is preferably demineralized in .5 to .6 N hydrochloric acid for a period of time of from about 1 to about 8 hours, more preferably for a time period of about two hours, at 25°C to 50°C, more preferably at 25°C to 37°C. Cancellous bone is preferably demineralized in .5 to .6N hydrochloric acid for a period of time of from about 20 minutes

55

5
to about 6.0 hours, more preferably for a time period of from about 30minutes to about 2.0 hours.
10 Preferably, cortical and/or cancellous bone is demineralized to contain less than 10 wt% residual
calcium, more preferably about less than 5 wt% residual calcium, even more preferably about 1 wt%
to about 3 wt%, and most preferably about 2 wt% residual calcium. Other methods for
15 demineralizing bone are well known in the art to which the present invention pertains, and can be
readily selected and employed by one of ordinary skill in the art, without undue experimentation.

20 *Discontinuous Bone Portion.* By the term "discontinuous bone portion" is intended for the
purposes of the present invention, a bone portion that contains artificially created void areas
including for example, a perforated bone portion, where the perforations or channels may be of any
25 shape and may partially or completely transverse the bone portion. Such perforations may be
randomly disposed or disposed in a regular pattern on and/or through the bone portion. Suitable
perforations include perforations traversing the width of the bone portion provided perpendicular to
30 the interfaces of the bone portions of the composite graft, and channels traversing the height of the
bone portion provided parallel to the interfaces of the bone portions of the composite graft. Such
perforations allow for uniform demineralization of a bone portion, and allow for ingrowth of patient
35 bone. A demineralized discontinuous bone portion may be perforated prior to demineralization or
after demineralization.

40 *Discrete Protrusion.* By the term "discrete protrusion" is intended for the purposes of the
present invention, a protrusion which is discontinuous, i.e. which has a distinct length and width,
45 where each discrete protrusion is separate and distinct from every other discrete protrusion, and
includes for example a protrusion whose length is less than three times its width, preferably less than
twice its width and more preferably a protrusion whose length is about equal to its width.

5

Interlocking. By the term "interlocking" is intended for the purposes of the present invention, any pattern provided on a bone portion which allows that bone portion to engage or

10 interlace with another bone portion, such that the engaged bone portions act as a single bone portion when stressed. Such bone portions may be provided with engaging patterns including but not

15 limited to the following: step patterns, sawtooth patterns, and ridged patterns, patterns that define mortise and tenon joints, and lock and key type patterns. These patterns may be either discrete, for example one bone portion may include one or more protrusions and a complementary bone portion

20 may be provided with one or more corresponding depressions, or continuous, for example bone portions are provided with complementary continuous grooves (See figs. 39, 40, and 41). The discrete patterns, may include protrusions and corresponding depressions of any shape and size

25 sufficient to provide an interlocking fit, and include round, square, rectangular, triangular, oval, irregular, and any combination of geometric and curved shaped protrusions and corresponding depressions. The depth/height of the discrete or continuous patterns is from about 0.1mm to about

30 3.5mm, preferably from about 0.2mm to about 2.0mm, more preferably from about 0.3mm to 1.5mm, and most preferably from about 0.5mm to about 1.0mm. One of ordinary skill in the art to which the invention pertain can readily determine, select and employ an appropriate depth/height

35 of the depression/protrusion based on the desired graft dimensions, whether or not a pin will also be used, clinical application, etc., without undue experimentation. Adjacent bone portions provided with interlocking patterns, may be self-locking such that no other connecting means, for example

40 one or more pins, is necessary to form a unitary structure, ie. to hold the composite bone graft together. Alternatively, interlocking bone portions may be "locked" to form a unitary structure using other connection means, for example, one or more pins partially or entirely traversing a

45

5
dimension of the composite bone graft, where the dimension is for example the height, width, or
length of the composite bone graft.

10 **Load-bearing.** By the term "load-bearing" is intended for the purposes of the present
invention a non-demineralized bone product for implantation in a patient at a site where the bone
15 graft will be expected to withstand some level of physical load(s).

20 **Locking pin.** By the term "locking-pin" is intended for the purposes of the present invention,
one or more pins entirely or partially traversing a dimension of a composite bone graft which serve
to hold the bone graft together, for example, two or more interlocking bone portions provided with
complementary patterns for example, a stepped pattern, may be locked using one or more pins, for
25 example, one bone pin partially traversing the length of the graft.

30 **Mechanical Strength.** By the term "mechanical strength" is intended for the purposes of the
present invention, the ability of a bone allograft to withstand mechanical loads at an implant site
without failing.

35 **Materials properties.** By the term "materials properties" is intended for the purposes of the
present invention, those properties present in normal fresh bone and include loading strength,
compressive strength, tensile strength, and brittleness.

40 **Normal bone.** By the term "normal bone" is intended for the purposes of the present
invention, fresh hydrated autogenous and/or fresh-frozen hydrated allograft bone tissue.

45 **Osteoconductivity.** By the term "osteoconductivity" is intended for the purposes of the
present invention, the ability of a substance which by its presence conducts osteoinductive activity.
Suitable osteoconductive materials include but are not limited to, for example, one or more
biocompatible matrix materials. Suitable osteoconductive substances include but are not limited to,

5
for example, hydroxyapatite; collagen; any biocompatible matrix material including for example,
polymeric matrix materials, bioglass, bioceramics, resorbable Biomaterials, bioabsorbable polymers,
10 a plastic matrix, stainless steel, titanium, and cobalt-chromium-molybdenum alloy matrix; and
substances including hydroxyapatite, including for example, Osteoset™ produced by Wright
15 Medical.

Osteoinductivity. By the term "osteinductivity" is intended for the purposes of the present
invention, the ability of a substance to promote bone growth. Suitable osteoinductive substances
20 include but are not limited to, for example, autograft bone; allograft bone; Grafton™ produced by
Osteotech; DynaGraft™; demineralized cortical bone; demineralized cancellous bone; collagen
including one or more growth factors including for example Novus™ produced by Stryker Biotech;
25 collagen including demineralized bone including for example DynaGraft™; cancellous bone; cortical
bone; OpteoForm™ produced by the University of Florida; OsteoFill™ produced by the University
of Florida; growth factors including for example, bone morphogenic protein and transforming
30 growth factor-β. Preferably, when a demineralized bone product is used the bone is demineralized
to contain less than 6 wt% residual calcium, more preferably demineralized to contain 1 wt% to
35 about 3 wt% residual calcium, and most preferably demineralized to contain about 2 wt% residual
calcium.

40 **Parallelepiped.** By the term "parallelepiped" is intended for the purposes of the present
invention, a six-faced polyhedron all of whose faces are parallelograms lying in pairs of parallel
planes.

45 **Polyhedron.** By the term "polyhedron" is intended for the purposes of the present invention,
a solid formed by plane faces, preferably formed by six faces.

5

10

15

20

25

Protrusion. By the term "protrusion" is intended for the purposes of the present invention, an irregularity in a surface of a bone allograft having a height of from 0.1 to 5.00 mm, preferably 0.3 to 3.0 mm, more preferably 0.5 to 1.5 mm, and most preferably .75mm to 1.2mm. The protrusions can be discrete, continuous, or a combination thereof, and can be of any shape including for example: irregular; pyrimidal; conical; cuboidal; rectangular; and cylindrical; or any combination thereof. Further, a cross-section of a continuous or discrete protrusion may be of any shape including for example: irregular; rectangular; square; oval; round; triangular; trapezoidal; and a regular or irregular curve; or any combination thereof. The protrusions can be provided on the bone allograft surface in a regular, symmetric pattern including for example a linear pattern or in an irregular pattern.

30

Self-locking, interlocking pattern. By the term "self-locking, interlocking pattern" is intended for the purposes of the present invention, any complementary patterns provided on adjacent bone portions which enable the bone portions: to interlock, act as a unitary structure, and the bone portions are held together, without the use of any additional connecting means.

35

Stability. By the term "stability" is intended for the purposes of the present invention the ability of the present composite bone graft to remain at an implantation site without significantly shifting, rotating, or being extruded.

40

Stress. By the term "stress" is intended for the purposes of the present invention, load per unit cross-sectional area.

45

Textured. By the term "textured" is intended for the purposes of the present invention, a composite bone graft having one or more textured surfaces provided on the surface of the composite bone graft where the surface of the composite bone graft can be any surface or a portion of any

50

55

5 surface including a natural surface and/or a cut surface. The textured surface preferably includes a
10 plurality of protrusions provided on the surface or a portion thereof, the protrusions of a shape
including for example, irregular; pyramidal; conical; cuboidal; rectangular; trapezoidal; curved; and
cylindrical; or any combination thereof. The protrusions can be discrete, continuous, or a
15 combination thereof.

Therapeutically Beneficial. By the term "therapeutically beneficial" is intended any material
which by its action or presence, bring about a therapeutic result in a patient. Such materials include
20 but are not limited to, for example, one or more of the following: osteoinductive substances,
osteoconductive substances, and pharmaceutically active agents. Such therapeutically beneficial
substances may optionally be provided with a carrier. Suitable osteoinductive substances include
25 but are not limited to, for example, autograft bone; allograft bone; Grafton™ produced by Osteotech;
DynaGraft™; demineralized cortical bone; demineralized cancellous bone; collagen including one
or more growth factors including for example Novus™ produced by Stryker Biotech; collagen
including demineralized bone including for example DynaGraft™; cancellous bone; cortical bone;
30 OpteoForm™ produced by the University of Florida; OsteoFill™ produced by the University of
Florida; growth factors including for example bone morphogenic protein, and transforming growth
factor-β. Suitable osteoconductive substances include but are not limited to, for example,
40 hydroxyapatite; collagen; any biocompatible matrix material including for example, polymeric
matrix materials, bioglass, bioceramics, resorbable Biomaterials; bioabsorbable polymers; a plastic
matrix; stainless steel; titanium; cobalt-chromium-molybdenum alloy matrix; and substances
45 including hydroxyapatite, including for example, Osteoset™ produced by Wright Medical. Suitable
pharmaceutically active agents include but are not limited to, for example, growth factors including

5
for example bone growth factors including for example bone morphogenic protein, and transforming
growth factor- β , and transforming growth factor- β ; chemotherapeutic agents; anti-inflammatory
10 agents; and antibiotics.

15 *II. Procurement and Preliminary Processing of Bone Tissue*

Suitable bone tissue includes bone obtained from any animal or human source. Preferably,
bone graft tissue can be obtained from the patient himself (autologous bone) or from a cadaver
20 (allograft bone). When allograft bone tissue is used, it is processed under strict aseptic conditions
in certified clean room operating suites. The bone tissue is preferably processed to remove all soft
tissue, including marrow and blood, to produce a cleaned bone graft. Suitable processing methods
25 are well known to those skilled in the art and can be readily selected and employed by those of
ordinary skill in the art without undue experimentation. Suitable methods include the methods
disclosed in, for example, United States Patent Nos: 5,556,379; 5,820,581; and 5,797,891.

After processing, the cleaned grafts are packaged under sterile conditions and stored for latter
processing into the present composite bone allograft, or immediately processed into the present
35 composite bone allograft followed by appropriate packaging. The use of fresh-frozen and/or freeze-
dried, bone allografts are preferred.

40 *III. How to Make a Preferred Embodiment of the Composite Bone Graft.*

Figure 11A illustrates a preferred method 60 of making the present composite bone graft.
45 A composite bone graft having of any size necessary for a particular application, can be made using
the preferred method discussed hereafter. A cortical bone shaft 61 is obtained from a cadaver and

5 is transected into cortical sections 62 having a length 63 of at least 18.0 mm, preferably at least 21.0 mm.

10 A cortical section 62 is then first cut to produce a cortical plank 64, the remaining cortical section 62a is turned and again cut to produce a second cortical plank, the remaining cortical plank 62b is again turned and cut into third and fourth cortical planks 64. The cortical planks 64 are cut
15 to an appropriate width 65 and thickness 66. The concave surface 64a of the plank 64 can be smoothed if needed to produce a smoothed plank 67. Opposing edges 67a and 67b can be cut such
20 that the cut surfaces 67c and 67d are approximately parallel. The cut width 68 should be larger than the final composite bone graft width. More specifically, cut width 68 is preferably greater than about
25 12.0mm.

The convex surface 64b of plank 64 is then smoothed to produce a smoothed plank 69. The smoothed plank 64 is further smoothed by for example, milling, such that the opposing surfaces 64a
30 and 64b, and 67c and 67d, are parallel, to produce a parallel plank 70 having a thickness 71 of at least 1.0 mm, preferably from about 1.5 mm to about 6.0 mm, and more preferably from about 2.0 mm to about 5.5 mm.

35 Figure 11B illustrates cortical pins 7 cut from a cortical section 62, using for example a drill press 72 or other means known in the art. The cortical pins 7, can also be made from a cortical plank 64, for example by turning on a lathe. The pins 7 have a diameter of from about 1.0 to about 6.0 mm,
40 preferably from about 1.5 mm to about 4.5 mm, and more preferably from about 2.0 mm to about 4.0 mm.

45 If the composite bone graft includes cancellous bone, cancellous bone planks 73 are produced and sized by the method as described above for producing cortical bone planks 69 and 70.

5
10
15
20
25
30
The composite bone unit 74 is then assembled as desired, for example a cortical parallel plank 70, a cancellous plank 73, and another cortical parallel plank 70. The composite bone unit 74 has a height 74a, a width 74b and a length 74c. The height 74a, width 74b and length 74c, can be readily selected by one of ordinary skill in the art, depending on factors including for example, the particular application and site of implantation in a patient. The planks are secured and holes 5 are drilled there through. The through-holes 5 are sized such that a tight or frictional fit is provided between a pin 7 and a through-hole 5. The cortical pins 7 are then inserted through the through-holes 5, and pressed to fit if needed, to produce pinned composite graft 75. The cortical bone pins 7 have a diameter 8 sufficient to provide an interference fit or frictional fit between a pin 7 and a through-hole 5. More specifically the diameter 8 of a cortical pin 7 is generally the same or slightly larger than the diameter 6 of a through-hole 5 into which it is to be inserted. The diameter of the pin 7 is preferably no more than 1.5mm larger than the diameter of the through-hole 5.

35
The assembled pinned graft can thereafter be shaped as desired, for example into a trapezoid shaped graft and appropriately dimensioned to produce a composite bone graft. One or more surfaces of the composite bone graft may be textured if desired, for example, depending upon the particular application.

40
45
50
Figure 12 illustrates an additional method 33 of making a preferred embodiment of the present composite bone graft. A cross-section of a femur is obtained from a cadaver, and cleaned using methods well known to those of ordinary skill in the art to which the present invention pertains, to remove bone marrow elements thereby producing the cleaned femoral ring 34. The cleaned femoral ring is then sectioned into several sections of cortical bone including a first cortical bone portion 35 and a second cortical bone portion 36, each portion having a width 37 of from about

5 2.0 to about 10.0 mm; preferably of from about 4.0 to about 8.0 mm; and more preferably of from
about 5.0 to about 6.0 mm. Portions 35 and 36 are then held together to form a graft unit 38 having
10 a width of 39 which is at least 4.0 mm; preferably greater than 9.0 mm; using for example, a clamp,
and one or more through-holes 5 having a diameter 6 of about 0.5mm to about 10.0 mm, preferably
15 2.0mm to about 5.0 mm, more preferably 2.0mm to about 4.0 mm, are then drilled there through.

Cortical pins 7 are produced from cortical bone by methods well known to those of ordinary
skill in the art to which the present invention pertains. The pins 7 have a diameter of from 1.0mm
20 to about 6.0 mm, preferably from about 1.5mm to about 4.5mm, and more preferably from about
2.0mm to about 4.0mm. The graft unit 38, having through-holes 5 drilled there through is then
placed in a press and one or more cortical pins 7 are inserted into the through-holes 5.
25

Thereafter, one or more surfaces 44 of the composite bone graft 45 can be textured by for
example, milling to create a desired texture including the illustrated continuous linear protrusions
30 (sawtooth pattern). Preferably, the composite bone graft includes opposing textured surfaces
disposed perpendicular to the interface(s) of the bone portions.

Figure 15 illustrates a preferred method for making a cervical wedge(flattened curved wedge)
35 composite bone graft. Cortical planks 70 are produced and pinned using cortical pins 7 as previously
described in Figures 11A and 11B to form a pinned cortical graft unit 89. The pinned graft unit 89
40 has a height 90, a length 91 and a width 92. The pinned graft unit 89 is then cut and shaped 94 to
a designated pattern 93 to form a flattened curved block 95. A through-hole 83 is then provided
centrally through the flattened curved block 95 using for example a drill press 72. The top 96 and
45

5

10

NOT FURNISHED UPON FILING

15

20

25

30

35

40

45

50

55

5 demineralized cancellous bone portion 106 is produced by first producing a cancellous parallel plank
73, as described above in reference to Figure 11. The cancellous parallel plank 73 is then
10 demineralized by any method well known to those of ordinary skill in the art, including for example,
demineralizing in .5-.6N hydrochloric acid at from 25°C to 50°C, preferably at from 25°C to 37°C,
15 for a period of time of from about 20 minutes to about 6.0 hours, preferably for about 30 minutes
to about 2.0 hour to produce a demineralized cancellous bone plank 106. More preferably,
demineralization is carried out until the bone plank 106 produced, contains less than 6 wt% residual
20 calcium, preferably about 1 wt% to about 3 wt% residual calcium, and most preferably demineralized
to contain about 2 wt% residual calcium. The demineralized cancellous bone plank 106 and the
25 cortical parallel planks 70 are then assembled, shaped, and textured to produce the composite bone
graft 105, according to the methods described in reference to figure 11.

30 Composite bone grafts including two or more distinct cortical bone portions each bone
portion provided with a pattern thereon to enable the bone portions to interlock or engage, are made
by first making cortical bone planks as described. After the planks are made they are each provided
35 with a pattern, for example a discrete or continuous pattern. The patterned planks are then fitted
together. The patterned planks may be self-locking, ie. provided with a "key" type pattern, to form
a unitary structure, or may be locked using one or more pins entirely or partially traversing a
40 dimension, ie. the graft's height, width, and/or length. Thereafter, the locked graft is shaped to form
the composite bone graft. Suitable patterns include any complementary patterns which when
45 provided on two or more adjacent bone portions, enable two or more bone portions to act as one,
where the patterns are self-locking or are locked with one or more additional connection means,
including for example one or more pins.

5

10

NOT FURNISHED UPON FILING

15

20

25

30

35

40

45

50

55

5

10

15

20

25

30

35

40

45

50

55

Figure 7 illustrates a perspective of a preferred composite bone graft 15 having a first cortical bone portion 16, a second cortical bone portion 17, cortical bone pins 18, through-holes 19, and void 107, where the diameter of the through-holes 19 and the diameter of the cortical bone pins 18 are configured to allow a slidable connection between the bone portions 16 and 17, and the bone portions 16 and 17 and the cortical bone pins 18. The composite bone graft 15 includes a top textured surface 14b and a bottom textured surface 14a disposed perpendicular to an interface between bone portions 16 and 17. Composite bone graft 15 may optionally include one or more cancellous or cortical bone portions disposed between and slidably connected to cortical bone portions 16 and 17, and to cortical bone pins 18.

Figure 8 illustrates a top view of composite bone graft 15 having a first cortical bone portion 16, a second cortical bone portion 17, and a cancellous bone portion 20 disposed there between, with one portions 16, 17, and 20 being slidably connected with cortical bone pins 19. This graft can be used in place of the traditional iliac crest wedge.

Figure 9 illustrates a perspective view of a preferred composite bone graft 21 including a first cortical bone portion 22, a second cortical bone portion 23, a third cortical bone portion 24, through-holes 5 and cortical bone pins 7.

Figure 10 illustrates a preferred composite bone graft 25 including a plurality of cortical bone portions including a first cortical bone portion 26, a second cortical bone portion 27, a third cortical bone portion 28, a forth cortical bone portion 29, a fifth cortical bone portion 30, and a single cortical bone pin 31 inserted in through-hole 32. This graft can be used in place of the traditional cloward dowel.

5

10

15

20

25

Figure 13A is a perspective view of a preferred trapezoid block composite bone graft having opposing textured surfaces which include a plurality of protrusions 80, and having a first cortical bone portion 2, a second cortical bone portion 4, a cancellous bone portion 3 sandwiched between bone portions 2 and 4, through-holes 5, and a cortical bone pins 7 having a diameter 8. The composite bone graft, has a length 9, a posterior height 13, an anterior height 11, a composite width 12, section widths 10a, 10b, and 10c, a length 76 which is the length of the graft measured from the anterior end to the center of the first pin 7, a length 77 which is the length of the graft measured from the center point of a first pin 7 to a center point of a second pin 7, and a length 78 which is the length of the graft measured from a center point of a second pin to the posterior end of the graft. The textured surface is detailed in Figure 13B. The protrusions 80 have a height of 81, and are cut in a "saw-tooth" pattern at an angle of 79.

30

35

40

45

Figures 14A, 14B and 14C, illustrate a cervical wedge composite bone graft (flattened curved wedge composite bone graft) for use in cervical fusions where 14A is a perspective standing view, 14B is a side view, and 14C is a perspective view where the graft is provided with opposing textured surfaces. The flattened curved wedge composite bone graft includes first and second cortical bone portions 82 held together by two cortical bone pins 7 to form a pinned graft unit, and the pinned graft unit having a hole 83 disposed there through located between pins 7. The cervical fusion graft has a diameter 84, a width 85, an front composite width 87, and a back composite width 86. The cervical fusion graft as shown in Figure 14C has textured opposing faces which include a plurality of pyrimidal protrusions 88.

50

40

Figure 16 illustrates a perspective view of a mechanical connector 46 having a slot 47 extending from its lower end.

55

5

Figure 17 illustrates a side view of mechanical connector 46 having a slot 47 extending from its lower end.

10

Figure 18 illustrates a cross-section view of mechanical connector 46 having a slot 47 extending from its lower end.

15

Figure 19 illustrates a perspective view of a mechanical connector 48 having a plurality of horizontally disposed grooves 49.

20

Figure 20 illustrates a perspective view of a mechanical connector 50 having helical threads 51.

25

Figure 21 illustrates a perspective view of a mechanical connector 52 having a plurality of vertically disposed grooves 53.

Figure 22 illustrates a perspective view of a mechanical slotted pin connector 54.

Figure 23 illustrates a perspective view of a mechanical connector 55 having a plurality of horizontally disposed ridges 56.

30

Figure 24 illustrates a perspective view of a mechanical triangular pin connector 57.

Figure 25 illustrates a perspective view of a mechanical square pin connector 58.

35

Figure 26 illustrates a perspective view of a mechanical hexagon pin connector 59.

Figure 27 illustrates a perspective view of a rectangular block composite bone graft 99, including a first cortical bone portion 2, a second cortical bone portion 4, a discontinuous, demineralized cortical bone portion 104 disposed between cortical bone portions 2 and 4, where the discontinuous, demineralized cortical bone portion 100 includes perforations traversing the width of the bone portion 100 and are disposed perpendicular to the interfaces of the bone portions 2, 100 and 4, and channels 102 traversing the height of bone portion 100 and are disposed parallel to the

45

50

55

5
10
15
20
25
30
35
40
45
50
55

interfaces of the bone portions 2, 100, and 4, through-holes 5, and cortical bone pins 7. The composite bone graft 99 includes opposing textured surfaces 14a and 14b provided perpendicular to the interfaces of the bone portions and defining a saw-tooth-like pattern.

Figure 28 illustrates a perspective view of a rectangular block composite bone graft 105, including a first cortical bone portion 2, a second cortical bone portion 4, a demineralized cancellous bone portion 106 disposed between cortical bone portions 2 and 4, through-holes 5, and cortical bone pins 7. The composite bone graft 105 includes opposing textured surfaces 14a and 14b provided perpendicular to the interfaces of the bone portions and defining a saw-tooth-like pattern.

Figure 31A illustrates a top view of a rectangular block composite bone graft 108, including a first cortical bone portion 2, a second cortical bone portion 4, a void 107 disposed between cortical bone portions 2 and 4, and cortical bone pins 7. The void 107 includes one or more therapeutically beneficial substances 109.

Figure 31B illustrates a perspective view of a rectangular block composite bone graft 108, including a first cortical bone portion 2, a second cortical bone portion 4, a void 107 disposed between cortical bone portions 2 and 4, through-holes 5, and cortical bone pins 7. The void 107 includes one or more therapeutically beneficial substances 109. The composite bone graft 108 includes opposing textured surfaces 14a and 14b provided perpendicular to the interfaces of the bone portions 2 and 4, with the therapeutically beneficial substance 109, and defining a saw-tooth-like pattern.

Figures 32A, 32B and 32C, illustrate a parallel block composite bone graft where 32A is a cross-section view, 32B is a top-view, and 32C is a side view of the width of the composite graft, where the graft is provided with opposing textured surfaces. The composite bone graft

5 includes first and second cortical bone units 110, a cancellous bone portion 3 sandwiched between
bone units 110, through-holes 5, and a cortical bone pins 7 (The diameter of each bone pin may be
10 the same or different depending on the particular application, implant and size of the graft, the
diameter of a pin is preferably about 1.0 to about 5.0 mm, more preferably from about 1.5 mm to
15 about 4.0 mm, even more preferably from about 2.0 to about 3.5 mm, and most preferably 2.5 to 3.0
mm). The composite bone graft, has a length 9 (preferably from 5.0 to about 50.0 mm, more
preferably from about 10.0 to about 30.0 mm, even more preferably from about 15.0 mm to about
20 25.0 mm, and most preferably about 21.0 mm), a height 112 (preferably from about 3.0 mm to about
30.0 mm, more preferably from about 5.0 mm to about 25.0mm, even more preferably from about
25 8.0 mm to about 15.0 mm), a composite width 12 (preferably from about 4.0 mm to about 20.0 mm,
more preferably from about 5.0 mm to about 15.0 mm), section widths 10a, 10b, and 10c, which are
preferably 4.0 mm, 3.0 mm, and 4.0 mm; 4.0 mm, 5.0 mm, and 4.0 mm; and 3.0 mm, 5.0 mm, and
30 3.0 mm; respectively, where two bone portions 111 are layered to form the bone unit 110, and where
the width of each bone portion 111 is such that when layered with another bone portion 111, the
resultant width 113 is as desired, for example, 4.0mm. The bone graft has a length 76 (for example
35 when the length of the graft is 21.0 mm, length 76 is preferably about 7.5 mm) which is the length
of the graft measured from the anterior end to the center of the first pin 7, a length 77 (for example
40 when the length of the graft is 21.0 mm, length 77 is preferably about 8.0 mm) which is the length
of the graft measured from the center point of a first pin 7 to a center point of a second pin 7, and
a length 78 (for example when the length of the graft is 21.0 mm, length 78 is preferably about 5.5
45 mm) which is the length of the graft measured from a center point of a second pin to the posterior
end of the graft. The protrusions 80 have a height of 81 (preferably from about 0.5 mm to about 2.5

5 mm, more preferably from about 1.0 mm to about 2.0 mm, and most preferably from about 1.1 mm to about 1.6 mm), and are cut in a "saw-tooth" pattern at an angle (preferably about 60°).

10 Figures 33A, 33B, and 33C, illustrate a trapezoid wedge composite where 33A is a cross-section view, 33B is a top-view, and 33C is a side view of the width of the composite graft. The composite bone graft includes first and second cortical bone units 110, a cancellous bone portion 3 sandwiched between bone units 110, through-holes 5, and a cortical bone pins 7 (The diameter of each bone pin may be the same or different depending on the particular application, implant and size of the graft, the diameter of a pin is preferably about 1.0 to about 5.0 mm, more preferably from about 1.5 to about 4.0 mm, even more preferably from about 2.0 to about 3.5 mm, and most preferably 2.5 to 3.0 mm). The composite bone graft, has a length 9 (preferably from 5.0 to about 50.0 mm, more preferably from about 10.0 to about 30.0 mm, even more preferably from about 15.0 mm to about 25.0 mm, and most preferably about 21.0mm), an anterior height 11 (preferably from about 3.0 mm to about 30.0 mm, more preferably from about 5.0 mm to about 25.0mm, even more preferably from about 8.0 mm to about 15.0 mm), a posterior height 13 (preferably from about 5.0 mm to about 50.0 mm, more preferably from about 7.0 mm to about 25.0 mm, and even more preferably from about 10.0 to about 15.0 mm), a composite width 12 (preferably from about 4.0 mm to about 20.0 mm, more preferably from about 5.0 mm to about 15.0 mm, section widths 10a, 10b, and 10c, which are preferably 4.0 mm, 3.0 mm, and 4.0mm; 4.0 mm, 5.0 mm, and 4.0 mm; and 3.0 mm, 5.0 mm, and 3.0 mm; respectively, where two bone portions 111 are layered to form the bone unit 110, and where the width of each bone portion 111 is such that when layered with another bone portion 111, the resultant width 10a or 10c is as desired, for example, 4.0mm. The bone graft has a length 76 (for example when the length of the graft is 21.0 mm, length 76 is preferably about 7.5

5 mm) which is the length of the graft measured from the anterior end to the center of the first pin 7, a length 77 (for example when the length of the graft is 21.0 mm, length 77 is preferably about 8.0
10 mm) which is the length of the graft measured from the center point of a first pin 7 to a center point of a second pin 7, and a length 78 (for example when the length of the graft is 21.0 mm, length 78 is preferably about 5.5 mm) which is the length of the graft measured from a center point of a second
15 pin to the posterior end of the graft.. The protrusions 80 have a height of 81 (preferably from about 0.5 mm to about 2.5 mm, more preferably from about 1.0 mm to about 2.0 mm, and most preferably from about 1.1 mm to about 1.6 mm), and are cut in a "saw-tooth" pattern at an angle (preferably about 60°).

25 Figure 34 illustrates a trapezoid wedge composite bone graft 113 including a first cortical bone portion 2, a second cortical bone portion 4, opposing textured surfaces 14a and 14b, vertically disposed channels 114 (preferably channels 114 have a diameter of from 0.25 mm to about 5.0 mm, more preferably from about) 0.5 mm to about 4.0 mm, and most preferably from about 1.0 mm to about 3.0 mm), and horizontally disposed channel 115 (preferably channels 115 have a diameter of
30 from about 0.5 to about 6.0 mm, more preferably from about 1.0 mm to about 5.0 mm, and most preferably from about 2.0 mm to about 4.0 mm). The composite bone graft also includes cortical bone pins 7 (preferably bone pins 7 have a diameter of from about 2.0 mm to about 3.5 mm, more preferably from about 2.5 mm to about 3.0 mm, where each pin may have the same or a different diameter) and through-holes 5. The channels may optionally include one or more therapeutically
35 beneficial substances. The graft has a length 9 (preferably from 5.0 to about 50.0 mm, more preferably from about 10.0 to about 30.0 mm, even more preferably from about 15.0 mm to about 25.0 mm, and most preferably about 21.0mm), an front height 11 (preferably from about 3.0 mm to

5 about 30.0 mm, more preferably from about 5.0 mm to about 25.0mm, even more preferably from
about 8.0 mm to about 15.0 mm), a back height 13 (preferably from about 5.0 mm to about 50.0 mm,
10 more preferably from about 7.0 mm to about 25.0 mm, and even more preferably from about 10.0
to about 15.0 mm), a composite width 12 (preferably from about 4.0 mm to about 20.0 mm, more
15 preferably from about 5.0 mm to about 15.0 mm and most preferably about 6.0 mm to about 8.0
mm), and a section width 116 (preferably from about 1.0 mm to about 5.0 mm, more preferably from
about 2.0 mm to about 4.0 mm, and most preferably from about 3.0 mm to about 3.5 mm).

20 Figure 35A illustrates a standing view of a cervical wedge composite bone graft having a
textured surface 117a. The cervical wedge composite bone graft includes first and second cortical
bone portions 82 held together by two cortical bone pins 7 to form a pinned graft unit, and the pinned
25 graft unit having a through-hole 83 (preferably from about 2.0 mm to about 8.0 mm in diameter,
more preferably from about 3.0 mm to about 5.0 mm) disposed there through located between pins
30 7. The cervical fusion graft has a diameter 84, a width 85, a front composite width 87, and a back
composite width 86. The cervical wedge also includes horizontally disposed channels 115
(preferably channels 115 have a diameter of from about 0.5 to about 10.0 mm, more preferably from
35 about 1.0 mm to about 5.0 mm, and most preferably from about 2.0 mm to about 4.0 mm), and one
or more therapeutically beneficial substances 109, for example cancellous bone or demineralized
cancellous bone, disposed in through-hole 83 and/or channels 115. Figure 35B illustrates a side view
40 of the cervical wedge composite bone graft of Fig. 35A and includes opposing textured surfaces
117a and 117b, and a vertically disposed channel 118. The top and bottom surfaces of the graft are
45 sloped at angel 119 and 120, respectively. Angle 119 is preferably from about 0° to about 10°, more
preferably from about 0° to about 7°, and in this figure it is 0°. Angle 120 is preferably from about

0° to about 10°, more preferably from about 0° to about 7°, and in this figure the angle is 7°, that is the graft slopes at 7°.

Figures 36A, 36B, and 36C, illustrate a trapezoid wedge composite bone graft including two cortical bone portions where 36A is a cross-section view, 36B is a top-view, and 36C is a side view of the width of the composite graft. The composite bone graft includes first and second cortical bone portions 2 and 4, through-holes 5, and a cortical bone pins 7 (The diameter of each bone pin may be the same or different depending on the particular application, implant and size of the graft, the diameter of a pin is preferably about 1.0 to about 5.0 mm, more preferably from about 1.5 to about 4.0 mm, even more preferably from about 2.0 to about 3.5 mm, and most preferably 2.5 to 3.0 mm). The composite bone graft, has a length 9 (preferably from 5.0 to about 50.0 mm, more preferably from about 10.0 to about 30.0 mm, even more preferably from about 15.0 mm to about 25.0 mm, and most preferably about 21.0mm to 23mm), an anterior (shorter) height 11 (preferably from about 3.0 mm to about 30.0 mm, more preferably from about 5.0 mm to about 25.0mm, even more preferably from about 8.0 mm to about 15.0 mm), a posterior (longer) height 13 (preferably from about 5.0 mm to about 50.0 mm, more preferably from about 7.0 mm to about 25.0 mm, and even more preferably from about 10.0 to about 15.0 mm), a composite width 12 (preferably from about 4.0 mm to about 20.0 mm, more preferably from about 5.0 mm to about 15.0 mm, section widths 124, which are preferably from about 2.0mm to about 5.0mm, more preferably from about 2.5mm to about 4.0mm, and most preferably about 3.5mm \pm 0.5mm. The bone graft has a length 122 (for example when the length of the graft is 23.0 mm, length 122 is preferably about 5.5mm) which is the length of the graft measured from the posterior (longer) end to the center of the first pin 7, a length 123 (for example when the length of the graft is 23.0 mm, length 123 is preferably about 13.5

5 mm) which is the length of the graft measured from the posterior (longer) end to the center point of
the second pin 7. The graft is chamfered at diametrically opposed edges including edge 140 at an
10 angle 125 of preferably about 45° at a depth 126 of preferably about 0.5mm. The wedge graft has
a slope 121 of preferably from about 3.0° to about 13.0° , more preferably from about 5.0° to about
15 11.0° , and most preferably about 5.4° or 10.8° depending on the anterior and posterior heights.

Figure 37 illustrates a cross-section view of a cervical wedge composite bone graft (flattened
curved wedge composite bone graft) for use in cervical fusions. The flattened curved wedge
20 composite bone graft includes two or more cortical bone portions held together by two cortical bone
pins 7 to form a pinned graft unit, and the pinned graft unit having a hole 83 disposed there through
located between pins 7 and having a diameter 130 of from about 3.0mm to about 7.0mm, more
25 preferably from about 4.0mm to about 6.0mm, and most preferably about 4.0mm to 5.0mm. The
distance 127 between hole 83 and second width 129, and between pins 7 and arc 137, is preferably
30 1.0mm to 3.5mm, more preferably about 1.5mm to about 3.0mm and even more preferably about
2.0mm. The distance 128 between hole 83 and pins 7 is preferably from 1.5mm to 3.5mm, more
preferably from 2.0mm to about 3.0mm, and most preferably is about 2.25mm to 2.75mm. The
35 cervical fusion graft has a diameter 84 of from about 10.0mm to about 20.0mm, more preferably
from about 12.0mm to about 16.0mm, and most preferably about 12.0mm to 14.0mm, a width 85 of
40 from about 14.0mm to about 24.0mm, more preferably from about 15.0mm to about 20.0mm, and
most preferably about 15.5mm to 17.5mm, and a second width 129 of from about 8.0mm to about
16.0mm, more preferably from about 10.0mm to about 14.0mm, and most preferably about 11.0mm
45 to 12.0mm. Slope 136 is preferably about 15° to about 30° , more preferably about 20° to about 25° ,
and most preferably about 20° .

5 Figure 38 illustrates a cross-section view of a cervical wedge composite bone graft (flattened
curved wedge composite bone graft) for use in cervical fusions. The flattened curved wedge
10 composite bone graft includes two or more cortical bone portions held together by two cortical bone
pins 7 to form a pinned graft unit, and the pinned graft unit having a hole 83 disposed there through
located between pins 7 and hole 83 having a height 131 of from about 5.0mm to about 15.0mm,
15 more preferably from about 6.0mm to about 12.0mm, and most preferably about 8.0mm to 10.0mm,
and having a width 130 of from 3.0mm to about 7.0mm, more preferably from about 4.0mm to about
20 6.0mm, and most preferably about 4.0mm to 5.0mm. The distance 127 between hole 83 and second
width 129, and between pins 7 and arc 137, is preferably 1.0mm to 3.5mm, more preferably about
1.5mm to about 3.0mm and even more preferably about 2.0mm. The distance 128 between hole 83
25 and pins 7 is preferably from 1.5mm to 3.5mm, more preferably from 1.0mm to about 3.0mm, and
most preferably is about 2.0mm. The cervical fusion graft has a diameter 84 of from about 10.0mm
30 to about 20.0mm, more preferably from about 12.0mm to about 16.0mm, and most preferably about
12.0mm to 14.0mm, a width 85 of from about 14.0mm to about 24.0mm, more preferably from about
15.0mm to about 20.0mm, and most preferably about 15.5mm to 17.5mm, and a second width 129
35 of from about 8.0mm to about 16.0mm, more preferably from about 10.0mm to about 14.0mm, and
most preferably about 11.0mm to 12.0mm. Slope 136 is preferably about 15° to about 30°, more
preferably about 20° to about 25°, and most preferably about 20°.

40 Figure 39 illustrates a perspective view of a preferred composite bone graft including cortical
bone portions 132, and a cortical bone pins 7. The cortical bone portions 132 are patterned with
45 grooves 133 running in direction 135 to provide an interlocking fit between the bone portions 132.

5

10

15

Figures 40A and 40B illustrate a wedge composite bone graft (flattened curved wedge composite bone graft) for use in cervical fusions where 14A is a standing side view, and 14B is a perspective view. The flattened curved wedge composite bone graft includes first and second cortical bone portions 132 held together by two cortical bone pins 7 to form a pinned graft unit, and the pinned graft unit having a hole 83 disposed there through located between pins 7. The cortical bone portions 132 are patterned with grooves 133 running in direction 135 to provide an interlocking fit between the bone portions 132.

20

25

Figure 41 illustrates a perspective view of a preferred composite bone graft including cortical bone portions 132 and 134, and a cortical bone pins 7. The cortical bone portions 132 and 134 are patterned with grooves 133 running in direction 135 to provide an interlocking fit between the bone portions 132.

30

35

Figures 42A, 42B, and 42C illustrate side views of a preferred composite bone graft including two patterned cortical bone portions 132 having a pattern 133, 138, and 139, respectively, where the bone portions are interlocked with each other. Figure 42C illustrates a self-locking, interlocking pattern 139.

40

45

Figure 43 illustrates a cross-section view of a cervical wedge composite bone graft (flattened curved wedge composite bone graft) for use in cervical fusions. The flattened curved wedge composite bone graft includes two or more cortical bone portions held together by two cortical bone pins 7 having a diameter of from 1.0mm to about 4.0mm, preferably from about 2.0mm to about 3.0mm and more preferably about 2.5mm, to form a pinned graft unit, and the pinned graft unit having a hole 83 disposed there through located between pins 7, and hole 83 having a width 130 of from 3.0mm to about 7.0mm, more preferably from about 4.0mm to about 6.0mm, and most

50

50

SUBSTITUTE SHEET (RULE 26)

55

5 preferably about 4.0mm to 5.0mm. The distance 127 between hole 83 and second width 129, and
between pins 7 and arc 137, is preferably 1.0mm to 3.5mm, more preferably about 1.5mm to about
10 3.0mm and even more preferably about 2.0mm. The distance 128 between hole 83 and pins 7 is
preferably from 1.5mm to 3.5mm, more preferably from 1.0mm to about 3.0mm, and most preferably
is about 2.0mm. The cervical fusion graft has a diameter 84 of from about 10.0mm to about
15 20.0mm, more preferably from about 12.0mm to about 16.0mm, and most preferably about 11.0mm
to 13.0mm, a width 85 of from about 10.0mm to about 24.0mm, more preferably from about 12.0mm
to about 20.0mm, and most preferably about 13.5mm to 15.5mm, and a second width 129 of from
20 about 4.0mm to about 12.0mm, more preferably from about 6.0mm to about 10.0mm, and most
preferably about 7.0mm to about 8.0mm. Slope 136 is preferably about 25°.

25 Figure 44 illustrates a cross-section view of a cervical wedge composite bone graft (flattened
curved wedge composite bone graft) for use in cervical fusions. The flattened curved wedge
composite bone graft includes two or more cortical bone portions held together by two cortical bone
30 pins 7 having a diameter of from 1.0mm to about 4.0mm, preferably from about 2.0mm to about
3.0mm and more preferably about 2.5mm, to form a pinned graft unit, and the pinned graft unit
having a hole 83 disposed there through located between pins 7, and hole 83 having a diameter 130
35 of from 3.0mm to about 9.0mm, more preferably from about 4.0mm to about 8.0mm, and most
preferably about 6.0mm to 7.0mm, and a width 141 of from about 5.0mm to about 13.0mm,
40 preferably from about 7.0mm to about 11.0mm, more preferably from about 8.5mm to about 9.5mm,
and most preferably about 9.0mm. Hole 83 has a second width 140 of from about 2.0mm to about
6.0mm, preferably from about 3.0mm to about 5.0mm, and more preferably from about 3.5mm to
45 about 4.5mm. The distance 127 between hole 83 and second width 129, and between pins 7 and arc

5 137, is preferably 1.0mm to 3.5mm, more preferably about 1.5mm to about 3.0mm and even more
preferably about 2.0mm. The cervical fusion graft has a diameter 84 of from about 10.0mm to about
10 20.0mm, more preferably from about 12.0mm to about 16.0mm, and most preferably about 13.0mm
to 15.0mm, a width 85 of from about 10.0mm to about 24.0mm, more preferably from about 12.0mm
15 to about 20.0mm, and most preferably about 16.5mm to 18.5mm, and a second width 129 of from
about 6.0mm to about 14.0mm, more preferably from about 8.0mm to about 12.0mm, and most
preferably about 9.0mm to 11.0mm. Slope 136 is preferably about 25°.

20 The present composite bone graft can include two or more bone portions, including any
combination of cancellous and cortical bone portions, or cancellous or cortical bone portions alone,
where the bone portions may optionally be demineralized, and may optionally be discontinuous,
25 where the bone portions are connected, for example by interlocking the bone portions, and/or by one
or more mechanical and/or chemical connectors. Any cancellous bone portion and/or discontinuous
30 bone portion (cortical and/or cancellous), and/or any demineralized bone portion (cortical and/or
cancellous) may optionally include one or more pharmaceutically active agents or therapeutically
beneficial substances provided therein, for example provided in the matrix of cancellous bone, or
35 provided in any artificially created void areas. Both the cortical and cancellous bone portions may
be solid and continuous or may be discontinuous (i.e. include one or more "holes" or "perforations"
40 of any shape disposed at regular or random intervals throughout the bone portion. Bone portions
may be provided with a pattern to enable an interlocking fit between cortical bone portions.

Suitable mechanical connectors include pin-type structures having any cross-section shape,
45 such shapes including for example, round, square, triangular, rectangular, hexagon, pentagon, oval,
and irregular. The pin-type structure can include surface modification, for example the surface can

5
10
15
20
25
30
35
40
45

be roughened, or provided with a plurality of horizontally or vertically disposed grooves (horizontal or vertically relative to the length of the pin); horizontally or vertically disposed ridges; or helical threads. The pin or surface-modified pin can also include one or more slots extending partially or entirely through the diameter of the pin, and extending partially or entirely through the length of the pin, suitable slots include for example, a slot extending partially through the diameter of the pin, for example about half-way through the diameter of the pin, and through the entire length of the pin; and a slot extending entirely through the diameter of the pin, and extending through a partial length of the pin for example, extending at least half-way through the length of the pin, preferably extending no more than about seven-eighths the length of the pin. Suitable mechanical connectors also include cotter pins. A composite graft can be pinned with one or more biocompatible pins, where the pins have substantially the same diameter or have a diameter different from each other. Suitable diameters can be readily selected and employed by one of ordinary skill in the art to which the present invention pertains without undue experimentation depending upon, for example, the particular application and implantation site, and the size and shape of the composite graft. The composite graft can be pinned with one or more biocompatible pins, entirely or partially traversing a dimension of the graft, for example, the height, length, and/or width of the composite graft. One of ordinary skill in the art to which the present invention pertains can readily select an appropriate pin, number of pins, and determine the orientation of the pin or pins, based on for example, the particular graft, whether the graft is interlocking or not, the orientation of the graft in the body, and the clinical indication, without undue experimentation.

50
55

Suitable chemical connectors include any biocompatible adhesive. Such adhesives are well known to those of ordinary skill in the art to which the present invention pertains, and can be readily

5
10
15
selected and employed by those of ordinary skill in the art, without undue experimentation. Suitable chemical connectors also include known methods of biochemical surface modification. Such methods are well known to those of ordinary skill in the art to which the present invention pertains, and can be readily selected and employed by those of ordinary skill in the art, without undue experimentation.

20
The chemical and/or mechanical connectors may be used alone or in any combination and may include one or more therapeutically beneficial substances including for example, one or more osteoinductive substances, one or more osteoconductive substances and one or more pharmaceutically active agents.

25
30
35
40
45
The through-hole(s) of the composite bone graft may also include surface modification as described above for the present mechanical connectors configured to accommodate a particular mechanical connector. For example, if a threaded cortical bone pin is used, the through-hole or holes can optionally be threaded. The through-hole(s) can traverse any dimension of the graft, provided that they are placed such that when graft unit is connected the graft is held together. One of ordinary skill in the art to which the present invention pertains can readily select an optimum location for the through-holes based on criteria including the following: the anterior and posterior height of the composite bone graft, and the diameter of the mechanical and/or mechanical and chemical connectors, and the height of the protrusions. For example, when the anterior height is relatively small (i.e. 7.0mm) and the diameter of the pin is relatively large (i.e. 2.5-3.0mm), the through-holes can be spaced equidistant along the length of the graft unit, or displaced toward the posterior end of the graft unit.

5

10

15

20

The graft unit can be connected with one or more mechanical connectors. Suitable connection include any connection which is adequate to hold the bone portions of the graft unit together. Such connections include, for example, an interference or friction connection where the diameter of the pin is the same as or slightly larger than (preferably no more than 1.5 mm larger than the diameter of the through-hole) the diameter of the corresponding through-hole; a slidable connection where the diameter of the pin is the slightly less than the diameter of the through-hole, and a compression fit, where the pin is configured to allow compression upon insertion where the pin expands after insertion, achieved for example, by providing the pin with a slot.

25

30

35

40

The mechanical connector of the invention, including pin-like connectors can be composed of any biocompatible material sufficient to hold together the present graft unit. Suitable biocompatible materials include for example, cortical bone; stainless steel; titanium; cobalt-chromium-molybdenum alloy; and a plastic for example, of one or more of the following: nylon, polycarbonate, polypropylene, polyacetal, polyethylene, and polysulfone, where the plastic can optionally include fibers; and a polymer including one or more bioabsorbable polymers including resorbable calcium phosphates; bioceramics and/or glasses including for example bioactive glasses and glass-ceramics; and calcium phosphate ceramics. Such mechanical connectors including for example, bioabsorbable polymers may optionally include one or more active agents, including for example one or more pharmaceutically active agents and/or one or more therapeutically beneficial agents, provided on the surface or impregnated in the matrix of the material.

45

The surface of the mechanical connector can be modified by methods well known to those of ordinary skill in the art to which the invention pertains, and include for example the following: (a) modification to influence cell adhesion and growth, provided by: (I) oxidized polystyrene surface,

50

55

SUBSTITUTE SHEET (RULE 26)

55

(ii) ammonia plasma-treated surface, and (iii) plasma-deposited acetone or methanol film; (b) modification to control protein adsorption; and (c) modification to improve lubricity.

The composite bone graft preferably has a shape including for example, a square, rectangular or curved block; a flattened curved wedge (ie. a cervical wedge for use in cervical fusion); a wedge; a trapezoid wedge; a polyhedron block, a parallelepiped; a cylinder or dowel having a uniform diameter or a decreasing or increasing diameter, for example a tapered cylinder or tapered dowel; a dowel or tapered dowel having a cross-section of a shape including for example, round, oval, square, rectangular, triangular, pentagon, or hexagon.

The composite bone graft can include one or more partially or completely textured surfaces. Preferably, a textured composite bone graft includes opposing textured surfaces disposed perpendicular to the interface(s) of the bone portions. The textured surface of the composite bone graft includes a plurality of protrusions. The protrusions can be formed over an entire surface of the composite bone graft or over a portion of a surface, for example over the entire cut surfaces, or over a portion of the cut surfaces. The plurality of protrusions can be formed on the surface in any number of ways well known to those of ordinary skill in the art to which the present invention pertains, including for example mechanical and/or chemical methods, including for example, by forming a series of parallel linear or curved grooves. The bone allograft protrusions can be formed by milling, for example by milling a set of parallel linear grooves to form a saw-tooth configuration on the cut surface of the composite graft to form continuous linear protrusions; by milling a first set of parallel linear grooves followed by turning the graft and forming a second set of parallel grooves at an angle to the first series, for example, at a 90° angle to form a plurality of discrete pyramidal protrusions. Milling is preferably achieved, by for example: running the graft over a milling tool

5 which includes a plurality of closely spaced blades which can be adjusted to achieve a desired height
and width; to form the discrete pyrimidal protrusions, the graft can then be turned at, for example,
10 a 90° angle and again run over the milling tool to produce the discrete protrusions illustrated.
Milling can also be achieved using for example a routing or dremel tool, a laser, and masking and
15 acid etching.

Other protrusions, for example concentric rings or other curved or irregular, or regular
protrusions can be provided by attaching a drill bit having a blade corresponding to the protrusion
20 pattern desired where the blade is appropriately sized to provide a desired protrusion width, length,
and height, to a drill and drilling the desired surface of the bone to achieve the desired textured
surface. One of ordinary skill in the art can readily design and produce, or select, and employ an
25 appropriate milling tool to achieve a desired textured surface on a bone allograft, without undue
experimentation.

30 Preferably, the protrusions (discrete, continuous, or a combination thereof) present on one
or more surfaces of the present allograft are closely spaced, preferably from about 0.0 to 3.0 mm
apart, preferably 0.1 to 2.0 mm apart, more preferably about 0.2 to 1.5 mm apart, and most
35 preferably about 0.5 mm apart, (that is, there is preferably a distance of from 0.0 to 3.0 mm between
the edges of two adjacent protrusions). The protrusions preferably have a height of from 0.1 to 5.00
40 mm, preferably 0.3 to 3.0 mm, more preferably 0.5 to 1.5 mm, and even more preferably .75 mm to
1.3mm, and most preferably about 1.2 mm.

45 The composite bone graft may include one or more void areas. Examples of such grafts
include a composite graft having for example a first and a second cortical bone portion where the
bone portions are for example slidably connected with for example one or more bone pins, where
50

5 the first and second bone portion are disposed apart thereby creating a centrally located void. The
10 void may optionally include any pharmaceutically active agent and/or therapeutically beneficial
agent, including for example, osteoinductive substances including for example, bone morphogenic
15 protein, hydroxyapatite, demineralized bone and bone products including for example GRAFTON
and DYNEGRAFT, and autograft bone; such substances may be in any form including for example,
in the form of a paste, gel, or sponge.

20 *IV. Use of the Composite Bone grafts*

The present composite bone grafts are useful in spinal applications including restoration of
25 column support and are preferably used from the posterior approach. Composite grafts suitable for
posterior lumbar interbody fusions include for example the following described in detail below: (a)
30 composite bone grafts having a trapezoid wedge shape and optionally having opposing textured
surfaces disposed perpendicular to the interfaces of the bone portions, (b) composite bone grafts
having a parallel block shape and optionally having opposing textured surfaces disposed
35 perpendicular to the interfaces of the bone portions, (c) composite bone grafts having a large square
block shape and optionally having opposing textured surfaces disposed perpendicular to the
40 interfaces of the bone portions, (d) composite bone graft blocks having a flattened curved wedge
shape and optionally having opposing textured surfaces disposed perpendicular to the interfaces of
the bone portions for use in for example, cervical fusion, (which can be used from an anterior or
45 posterior approach) and (e) composite bone grafts having an ovoid wedge shape for performing
anterior fusions (which can be used from an anterior or posterior approach).

5

10

The term "about" used below and throughout this disclosure in reference to specific dimensions means that the tolerance limits for overall or outer dimensions of the composite bone graft is plus or minus (+/-) 1.0 mm, and the tolerance limits for the width of individual cortical bone portions is plus or minus (+/-) 0.5 mm.

15

20

25

The composite bone grafts having a trapezoid wedge shape, the shape as shown in Figure 1, and optionally having opposing textured surfaces disposed perpendicular to the interfaces of the bone portions, preferably include two or more bone portions where the bone portions can be cortical or cancellous bone portions or a combination thereof, each bone portion having a width of from about 1.5 mm to about 10.0 mm, preferably from about 2.0 mm to about 7.0 mm, more preferably from about 2.0 mm to about 5.0 mm, and most preferably having a width of about 2.0 mm to about 4.0 mm, to give a composite width of from about 8.0 mm to about 15.0 mm, preferably from about 9.0 mm to about 13.0 mm, and more preferably about 11.0 mm.

30

35

40

45

The trapezoid wedge composite bone graft has a front (anterior) height which is smaller than its back (posterior) height, the anterior height being from about 5.0 mm to about 15.0 mm, preferably from about 6.0 mm to about 13.0 mm, more preferably from about 7.0 mm to about 12.0 mm, and most preferably about 8.0 mm, 9.0 mm, 10.0 mm, 12.0 mm, or 14.0 mm; the posterior height being from about 7.0 mm to about 20.0 mm, preferably from about 8.0 mm to about 17.0 mm, more preferably from about 9.0 mm to about 15.0 mm, and most preferably the posterior height is about 7.0 mm, 10.0 mm, 11.0 mm, 12.0 mm, or 14.0 mm; and the trapezoid wedge composite bone graft has a length of from about 15.0 mm to about 35.0 mm, preferably from about 17.0 mm to about 30.0 mm, more preferably from about 20.0 mm to about 27.0 mm, and most preferably a length of about 21.0 mm, or 23.0 mm.

50

59

SUBSTITUTE SHEET (RULE 26)

55

5

10

15

20

25

30

35

40

45

50

The bone portions may be interlocking and/or connected with one or more mechanical and/or chemical biocompatible connectors. The preferred connectors include mechanical connectors including for example, one or more cortical bone pins having a round cross-section and having a diameter of from about 1.0 mm to about 6.0 mm, preferably from about 2.0 mm to about 5.0 mm, more preferably from about 2.0 mm to about 4.5 mm, and most preferably a pin diameter of from about 2.0 mm to about 4.0 mm, where the diameter of each pin in a single graft may be the same or different. The diameter of the two corresponding through-holes is preferably sufficient to provide an interference or frictional or slidable connection between the bone portions and the pin, preferably a interference or frictional connection. The foregoing described trapezoid wedge composite optionally includes a cancellous bone portion disposed between the two cortical bone portions and having the same width or a greater width than the cortical bone portions. The trapezoid wedge composite graft can optionally include diametrically opposed chamfered edges.

Most preferable trapezoid wedge composite bone grafts include the following configurations:

(a) a first cortical portion having a width of from about 3.0mm to about 4.0 mm, preferably about 4.0 mm; a second cortical bone portion having a width of from about 3.0 mm to about 4.0 mm, preferably about 4.0 mm; a central cancellous bone portion having a width of from about 3.0 mm to about 5.0 mm, preferably about 3.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of from about 2.0 mm to about 4.0 mm, the composite graft having an overall length of about 21.0 mm, an anterior height of about 9.0mm, and a posterior height of about 11.0 mm; or an anterior height of about 8.0 mm and a posterior height of about 10.0 mm, or an anterior height of about 10.0 mm and a posterior height of about 12.0 mm, or an anterior height of about 12.0 mm and a posterior height of about 14.0 mm.

60

SUBSTITUTE SHEET (RULE 26)

55

5

10

15

20

25

30

(b) a first cortical portion having a width of about 4.0 mm; a second cortical bone portion having a width of about 4.0mm; a central cancellous bone portion having a width of about 3.0 mm disposed there between forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 3.0 mm, the composite graft having an overall length of about 21.0 mm, an anterior height of about 9.0 mm, and a posterior height of about 11.0 mm, or an anterior height of about 8.0 mm and a posterior height of about 10.0 mm, or an anterior height of about 10.0 mm and a posterior height of about 12.0 mm, or an anterior height of about 12.0 mm and a posterior height of about 14.0 mm; and where the length of the graft measured from the posterior end to the center of the first pin is about 5.5 mm, the length of the graft measured from the center point of a first pin to a center point of a second pin is about 8.0 mm and, the length of the graft measured from a center point of a second pin to the anterior end of the graft is about 7.5 mm, and optionally having opposing textured surfaces where the protrusions are in a saw-tooth pattern, and have a height of about 1.2 mm and have an angle of about 60° between protrusions;

35

40

45

50

(c) a first cortical portion having a width of about 3.0 mm; a second cortical bone portion having a width of about 3.0 mm; a central cancellous bone portion having a width of about 3.0 mm disposed there between forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 4.0 mm, the composite graft having an overall length of about 21.0 mm, an anterior height of about 7.0 mm, and a posterior height of about 9.0 mm, or an anterior height of about 8.0 mm and a posterior height of about 10.0 mm, or an anterior height of about 10.0 mm and a posterior height of about 12.0 mm, or an anterior height of about 12.0 mm and a posterior height of about 14.0 mm; and where the length of the graft measured from the posterior end to the center of the first pin is about 6.0 mm, the length of the graft measured from the center point of a

55

5

10

first pin to a center point of a second pin is about 9.0 mm and, the length of the graft measured from a center point of a second pin to the anterior end of the graft is about 6.0 mm, and optionally having opposing textured surfaces where the protrusions are in a saw-tooth pattern, and have a height of about 1.2 mm and have an angle of about 60° between protrusions;

15

20

(d) a first cortical portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, a central cancellous bone portion having a width of about 5.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, the composite graft having an overall length of about 21.0 mm, an anterior height of about 9.0 mm, and a posterior height of about 11.0 mm;

25

30

(e) a first cortical portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, a central cancellous bone portion having a width of about 7.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, the composite graft having an overall length of about 21.0 mm, an anterior height of about 11.0 mm, and a posterior height of about 13.0 mm;

35

40

(f) a first cortical portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, a central cancellous bone portion having a width of about 3.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 2.0 to about 4.0 mm, the composite graft having an overall length of about 21.0 mm, an anterior height of about 7.0 mm, and a posterior height of about 9.0 mm;

45

50

55

5

10

(g) a first cortical portion having a width of about 4.0 mm, a second cortical bone portion having a width of about 4.0 mm forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 3.0 mm, the composite graft having an overall length of about 25.0 mm, an anterior height of about 12.0 mm, and a posterior height of about 15.0 mm;

15

20

25

30

(b) a first, second, third and fourth cortical bone portion each having a width of from about 2.0 mm to about 3.0 mm, preferably about 2.0 mm, a first cancellous bone portion having a width of from about 2.0 mm to about 3.0 mm, preferably about 3.0 mm, where the first cortical bone portion is disposed on the second cortical bone portion, the first cancellous bone portion is disposed between the second and third cortical bone portions, and the fourth cortical bone portion is disposed on the third cortical bone portion, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, the composite graft having an overall length of about 21.0 mm, an anterior height of about 9.0 mm, a posterior height of about 11.0 mm, and a composite width of about 11.0 mm;

35

40

45

50

(i) a combination of at least two cortical bone portions optionally having a cancellous bone portion disposed therebetween, and having: (1) a posterior height of 9.0 mm an anterior height of 7.0 mm, a length of 21.0 mm, and a composite width of 12.0 mm; (2) a posterior height of 9.0 mm an anterior height of 7.0 mm, a length of 25.0 mm, and a composite width of 12.0 mm; (3) a posterior height of 11.0 mm, an anterior height of 9.0 mm, a length of 23.0 mm, and a composite width of 12.0 mm; (4) a posterior height of 11.0 mm, an anterior height of 9.0 mm, a length of 25.0 mm, and a composite width of 12.0 mm; (5) a posterior height of 13.0 mm, an anterior height of 11.0 mm, a length of 25.0 mm, and a composite width of 12.0 mm; and (6) a posterior height of 15.0 mm, an anterior height of 13.0 mm, a length of 25.0 mm, and a composite width of 12.0 mm; and

55

(j) a combination of two or more cortical bone portions optionally each having a patterned surface such that an interlocking fit between the bone portions is provided, and having: (1) a posterior height of 14.0 mm an anterior height of 10.0 mm, a length of 21.0 mm, and a composite width of 7.0 mm, two cortical bone pins each having a diameter of 3.0mm, and a slope of 10.8°, and having diametrically opposed chamfered edges at 45° and 0.5mm in depth, a distance from the center of the first pin to the center point of the second pin of 8.0mm, and a distance from the anterior end of the graft to the center point of the first pin of 7.5mm; (2) a posterior height of 12.0 mm an anterior height of 10.0 mm, a length of 21.0 mm, and a composite width of 7.0 mm, two cortical bone pins each having a diameter of 3.0mm, and a slope of 5.45°, having diametrically opposed chamfered edges at 45° and 0.5mm in depth, a distance from the center of the first pin to the second of the second pin of 8.0mm, and a distance from the anterior end of the graft to the center point of the first pin of 7.5mm; (3) a posterior height of 14.0 mm an anterior height of 12.0 mm, a length of 21.0 mm, and a composite width of 7.0 mm, two cortical bone pins each having a diameter of 3.0mm, and a slope of 5.45°, having diametrically opposed chamfered edges at 45° and 0.5mm in depth, a distance from the center of the first pin to the second of the second pin of 8.0mm, and a distance from the anterior end of the graft to the center point of the first pin of 7.5mm; (4) a posterior height of 11.0 mm, an anterior height of 9.0 mm, a length of 25.0 mm, and a composite width of 12.0 mm; (5) a posterior height of 12.0 mm an anterior height of 9.8mm, a length of 23.0 mm, and a composite width of 7.0 mm, two cortical bone pins each having a diameter of 3.0mm, and a slope of 5.5°, having diametrically opposed chamfered edges at 45° and 0.5mm in depth, a distance from the center point of the second pin to the posterior end of the graft of 13.5mm, and a distance from the center point of the first pin to the posterior end of the graft 5.5mm; (6) a posterior height of 14.0

5 mm an anterior height of 9.8mm, a length of 23.0 mm, and a composite width of 7.0 mm, two
cortical bone pins each having a diameter of 3.0mm, and a slope of 10.8°, having diametrically
10 opposed chamfered edges at 45° and 0.5mm in depth, a distance from the center point of the second
pin to the posterior end of the graft of 13.5mm, and a distance from the center point of the first pin
15 to the posterior end of the graft 5.5mm; (7) a posterior height of 13.0 mm an anterior height of
9.0mm, a length of 23.0 mm, and a composite width of 7.0 mm, two cortical bone pins each having
a diameter of 3.0mm, and a slope of 10.8°, having diametrically opposed chamfered edges at 45°
20 and 0.5mm in depth, a distance from the center point of the second pin to the posterior end of the
graft of 13.5mm, and a distance from the center point of the first pin to the posterior end of the graft
of 5.5mm; (8) a posterior height of 13.0 mm an anterior height of 11.0mm, a length of 23.0 mm, and
25 a composite width of 7.0 mm, two cortical bone pins each having a diameter of 3.0mm, and a slope
of 5.4°, having diametrically opposed chamfered edges at 45° and 0.5mm in depth, a distance from
30 the center point of the second pin to the posterior end of the graft of 13.5mm, and a distance from
the center point of the first pin to the posterior end of the graft 5.5mm; (9) a posterior height of 11.0
mm an anterior height of 9.0mm, a length of 23.0 mm, and a composite width of 7.0 mm, two
35 cortical bone pins each having a diameter of 3.0mm, and a slope of 5.4°, having diametrically
opposed chamfered edges at 45° and 0.5mm in depth, a distance from the center point of the second
pin to the posterior end of the graft of 13.5mm, and a distance from the center point of the first pin
40 to the posterior end of the graft of 5.5mm; (10) a posterior height of 7.0 mm an anterior height of
5.0mm, a length of 21.0 mm, two cortical bone pins, and optionally having diametrically opposed
45 chamfered edges; (11) a posterior height of 7.0 mm an anterior height of 5.0mm, a length of 23.0
mm, two cortical bone pins and optionally having diametrically opposed chamfered edges; and (12)

5

10

NOT FURNISHED UPON FILING

15

20

25

30

35

40

45

50

55

5
10
15
20
25
30
35
40
45
50

(b) two or more cortical bone portions layered to form a graft unit, and optionally one or more cancellous bone portions disposed between said cortical bone portions, the graft unit being connected by one or more mechanical connectors, preferably two cortical bone pins having a diameter of from about 1.0 mm to about 6.0 mm, preferably from about 2.0 mm to about 5.0 mm, more preferably from about 2.5 mm to about 4.5 mm, and most preferably a pin diameter of from about 3.0 mm to about 4.0 mm, where the diameter of each pin may be the same or different, and having a composite width of from 4.5 mm to about 30.0 mm, preferably from about 6.0 mm to about 21.0 mm, more preferably from about 9.0 mm to about 15.0 mm, and most preferably having a width of about 4.0 mm to give a composite width of about 12.0 mm to about 15.0 mm, a posterior and anterior height of from about 5.0 mm to about 20.0 mm, preferably from about 9.0 mm to about 17.0 mm, and a length of from about 20.0 mm to about 30.0 mm, specific preferred configurations include the following: following configurations: (1) an anterior and posterior height of about 9.0 mm, and a length of about 25.0 mm; (2) an anterior and posterior height of about 9.0 mm, and a length of about 21.0 mm; (3) an anterior and posterior height of about 11.0 mm, and a length of about 25.0 mm; (4) an anterior and posterior height of about 11.0 mm, and a length of about 21.0 mm; (5) an anterior and posterior height of about 13.0 mm, and a length of about 25.0 mm; (6) an anterior and posterior height of about 11.0 mm, and a length of about 23.0 mm; (7) an anterior and posterior height of about 13.0 mm, and a length of about 23.0 mm; (8) an anterior and posterior height of about 15.0 mm, and a length of about 25.0 mm; and (9) an anterior and posterior height of about 17.0 mm, and a length of about 25.0 mm. The foregoing described parallel block composite bone graft optionally includes a cancellous bone portion disposed between the two cortical bone portions and having the same width or a greater width than the cortical bone portions.

5

Most preferable parallel block composite bone grafts include the following configurations:

10

(a) two or more cortical bone portions having a composite width of about 15.0 mm, held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, where each pin has the same or a different diameter, the composite graft having a height of about 16.0 mm and a length of about 25.0 mm,

15

20

(b) a first cortical portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, one or more central cancellous bone portions having a composite width of about 9.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, where the diameter of each pin is the same or different, the composite graft having a height of about 16.0 mm and an overall length of about 25.0 mm, the parallel block composite bone graft also includes opposing textured surfaces disposed perpendicular to the interfaces of the bone portions;

25

30

(c) a first cortical bone portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, a central cancellous bone portion having a width of about 3.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, where the diameter of each bone pin is the same or different, the composite graft having a height of about 10.0 mm and a length of about 25.0 mm, the parallel block composite bone graft also includes opposing textured surfaces disposed perpendicular to the interfaces of the bone portions;

35

40

45

(d) a first cortical portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, a central cancellous bone portion having a width of about 3.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone

50

55

5 pins having a diameter of about 2.0 mm to about 4.0 mm, where the diameter is the same or different, the composite graft having a height of about 9.0 mm and a length of about 21.0 mm,

10 (e) a first cortical portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, a central cancellous bone portion having a width of about 5.0 mm disposed there between, forming a graft unit, the graft unit held together by two round cortical bone
15 pins having a diameter of about 2.0 mm to about 4.0 mm, Where the diameter of each bone pin is the same or different, the composite graft having a height of about 11.0 mm and a length of about 21.0 mm, and
20

(f) a first cortical portion having a width of about 3.0 mm, a second cortical bone portion having a width of about 3.0 mm, a central cancellous bone portion having a width of about 7.0 mm
25 disposed there between, forming a graft unit, the graft unit held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, where the diameter of each bone pin is the same or different, the composite graft having a height of about 13.0 mm and a length of about 21.0 mm.
30

Most preferable cortical block composite bone grafts include the following configurations:

35 (a) a plurality of cortical bone portions each having a width of from about 3.0 mm to about 4.0 mm, preferably about 3.0 mm and the plurality of cortical bone portions having a composite width of from about 18.0 to about 22.0 mm, preferably a composite width of about 20.0 mm, the cortical
40 block composite has a height of from about 18.0 to about 22.0 mm, preferably of about 20.0 mm and a length of from about 18.0 to about 22.0 mm, preferably of about 20.0 mm or 21.0 mm, with the
45 graft unit held together by two round cortical bone pins having a diameter of about 2.0 mm to about 4.0 mm, where the diameter of each pin is the same or different, and (b) the cortical block composite

5 bone graft of (a) where one or more of the central cortical bone portions are replaced with one or
10 more cancellous bone portions having an overall width of from about 3.0 to about 15.0 mm,
preferably about 14.0 mm.

15 Most preferable cervical wedge grafts (flattened curved wedge composite bone grafts) for
cervical fusion, include the following configurations: a combination of two or more cortical bone
portions optionally each having a patterned surface such that an interlocking fit between the bone
20 portions is provided, and: (a) a first cervical (flattened curved) cortical portion having a width of
from about 2.0 mm to about 8.0 mm; a second cervical cortical bone portion having a width of from
about 2.0 mm to about 8.0 mm; where the first portion is disposed on the second portion forming
25 a graft unit, the graft unit is held together by at least two cortical bone pins having a diameter of from
about 2.0 mm to about 4.0 mm, preferably 2.0 mm to about 3.0 mm; where the diameter of each pin
is the same or different, the composite graft having a width of about 10.0 to about 20.0 mm,
30 preferably about 16.0 mm, a diameter of about 10.0 mm to about 18.0 mm, preferably about 13.0
mm, and a centrally located hole, preferably from about 2.0 to about 8.0 mm in diameter, more
preferably from about 3.0 to about 5.0 mm in diameter, disposed through the pinned graft unit,
35 between at least two pins. Each of the top and bottom surfaces of the cervical fusion graft, from a
side view, may be sloped at an angle of from about 0° to about 15°, preferably at an angle of from
about 3° to about 10°, and most preferably one of the top or bottom surfaces sloped at an angle of
40 about 7° with the other surface not sloped, along the top and bottom faces of the graft from the
curved top end to the flattened bottom end as shown in Figures 14 and 15, to form the wedge shape.
45

5 The anterior composite width at the flattened end is preferably from about 6.0 to about 8.0 mm. The
10 top and bottom opposing faces of the cervical graft may optionally be textured, preferably with a
plurality of pyramidal protrusions,

(b) a first cervical (flattened curved) cortical portion having a width of from about 2.0 mm
15 to about 8.0 mm; a second cervical cortical bone portion having a width of from about 2.0 mm to
about 8.0 mm; where the first portion is disposed on the second portion forming a graft unit, the graft
unit is held together by at least two cortical bone pins having a diameter of from about 2.0 mm to
20 about 4.0 mm, preferably 2.0 mm to about 3.0 mm; where the diameter of each pin may be the same
or different, the composite graft having a width of about 15.0 to about 25.0 mm, preferably about
25 19.0 mm, a diameter of about 12.0 mm to about 20.0 mm, preferably about 15.0 mm, and a centrally
located hole disposed through the pinned graft unit, between at least two pins. The cervical fusion
graft, from a side view, is preferably sloped at an angle of from about 3° to about 15°, preferably
30 at an angle of about 7° along the top and bottom faces, or an angle of 0° along the top surface and
an angle of 7° along the bottom surface, of the graft from the curved end to the flattened end as
shown in Figures 14 and 15, to form the wedge shape. The anterior composite width at the flattened
35 end is preferably from about 6.0 to about 8.0 mm. The top and bottom opposing faces of the cervical
graft may optionally be textured, preferably with a plurality of pyramidal protrusions,

40 (c) a first and a second cervical (flattened curved) cortical bone portion, the first bone portion
disposed on the second bone portion to form a graft unit, the graft unit is held together by at least
45 two cortical bone pins having a diameter of from about 2.0 mm to about 4.0 mm, and having the
following preferred configurations: a posterior composite width of from 5.0 mm to 15.0 mm,
preferably from about 8.0 mm to 10.0 mm, an anterior composite width of from about 5.0 mm to

5
about 10.0 mm, preferably from about 6.0 mm to about 8.0 mm, ; the composite graft having a
width of from about 12.0 to about 25.0 mm, preferably from about 16.0 mm to about 19.0 mm, a
10 diameter of from about 10.0 mm to about 20.0 mm, preferably from about 13.0 mm to about 15.0
mm, and a centrally located hole disposed through the pinned graft unit, between at least two pins.
15 The graft, from a side view, is preferably sloped at an angle of from about 3° to about 15°,
preferably at an angle of about 7°, or an angle of 0° along the top surface and an angle of 7° along
the bottom surface, along the top and bottom faces of the graft from the curved end to the flattened
20 end as shown in Figures 14 and 15, to form the wedge shape. The top and bottom opposing faces of
the cervical graft may optionally be textured, preferably with a plurality of pyramidal protrusions;
and
25

(d) two or more bone portions preferably cortical bone portions, layered to form a graft unit,
where the bone portions are connected by: being configured to interlock with each other where the
30 interlocking is self-locking or is locked with one or more pins entirely or partially traversing a
dimension of the graft, and/or at least two cortical bone pins having a diameter of from about 2.0mm
to about 4.0mm and having the following preferred configurations: (I) a diameter of about 14.0mm;
35 a width of about 17.5mm; a pin diameter of about 2.5mm; a through-hole having a diameter of about
6.5mm, a first width of about 9.0mm, and a second width of about 4.0mm; a distance from the arc
to a pin and from the through-hole to the second width of the graft, of about 2.0mm; a second width
40 of about 10.0mm, and the graft having its sides sloped at an angle of about 25° (see fig. 44); and (ii)
a diameter of about 12.0mm; a width of about 14.5mm; a pin diameter of about 2.5mm; a through-
45

5 hole having a diameter of about 4.0mm; a distance from the arc to a pin and from the through-hole
10 to the second width of the graft, and from the pin to the through-hole, of about 2.0mm; a second
width of about 7.75mm, and the graft having its sides sloped at an angle of about 25° (see fig. 43).

15 Most preferable anterior lumbar oval wedge composite bone grafts include the following
configurations: (a) two or more ovoid cortical bone portions disposed on each other thereby forming
a graft unit having a composite posterior width of from about 5.0 mm to about 20.0 mm, preferably
20 from about 1.0 mm to about 15.0 mm, an anterior composite width of from 5.0 mm to about 20.0
mm, preferably from about 8.0 mm to about 14.0 mm, a height of from about 15.0 mm to about 30.0
mm, preferably from about 21.0 mm to about 28.0 mm, and a length of from about 23.0 mm to about
25 45.0 mm, preferably from about 32.0 mm to about 42.0 mm; the graft unit is held together by at least
two cortical bone pins having a diameter of from about 2.0 mm to about 4.0 mm, where the pins
have the same or a different diameter, to form a pinned graft unit; and optionally one or more
30 through- holes disposed through the pinned graft unit. The graft, from a side view, is preferably
sloped at an angle of from about 3° to about 15°, preferably at an angle of about 7°, or an angle of
35 0° along the top surface and an angle of 7° along the bottom surface, along the top and bottom
faces of the to form the wedge shape. The top and bottom opposing faces of the cervical graft may
optionally be textured.

40 Any one or more of the cortical and/or cancellous bone portions of the above-described
composite bone grafts, may optionally be demineralized and/or discontinuous, depending upon the
particular clinical application. For example, any one or more bone portions of any composite graft
45 may include for example, one or more horizontally disposed channels, vertically disposed channels
or randomly disposed channels, partially or completely traversing the height and/or width of the

5 graft. One of ordinary skill in the art to which the present invention pertains can readily select, make
10 and employ, a particular composite graft, without undue experimentation.

V. Surgical Implantation and Indications

15 The present composite bone graft is useful for implantation in patients suffering from defects
caused by congenital anomaly, disease, or trauma, including for example, spine fractures; deformity,
e.g. kyphotic deformities, e.g. posttraumatic kyphosis; postlaminectomy kyphosis, junctional
20 kyphosis, and Scheuermann's kyphosis; scoliosis, e.g. neuromuscular scoliosis, adult scoliosis,
paralytic scoliosis, congenital and syndromic scoliosis; and cervical neck pain. Surgical methods
25 for correcting degenerative conditions, for example in the lumbar spine, include decompression
(excision of disc material, hypertrophied bone, or ligament along with fusion, or fusion alone.

A posterior surgical approach is preferably used. The choice of approach is dictated by the
30 site of primary pathology and the physical size of the composite bone graft. Pathology that involves
vertebral bodies is best approached anteriorly through the thorax, abdomen or flank. Pathology
involving posterior elements are best approached posteriorly for example, through a vertical midline
35 approach or posterior lateral muscle spinning approach.

Those of ordinary skill in the art to which the present invention pertain, including for
40 example an orthopaedic surgeon and a spinal surgeon, can readily select and employ a particular
composite bone graft, without undue experimentation. Factors to be considered in such selection
and employment include: the type and size of graft bone, its anatomic site of fusion, and the age of
45 the patient. An ideal graft, for example for use in lumbar interbody fusion, should be:
osteoinductive, non-immunogenic, provide immediate mechanical stability, and be appropriately

5 sized and shaped for the particular application/patient. Indications, diagnostic criteria, graft selection
and surgical technique, are factors that can be readily selected, optimized and employed by those of
10 ordinary skill in the art without undue experimentation, and are discussed in: Master Techniques in
Orthopaedic Surgery, *The Spine*, edited by Bradford, David S., Lippincott-Raven, ISBN 0-7817-
15 0033-7, Philadelphia, PA, (1997), hereby incorporated herein by reference in its entirety. When
implanting a cervical fusion graft, an anterior cervical approach is used.

20 The following examples are illustrative only, and do not in any way limit the scope of the
invention.

25 **EXAMPLES**

I. Preparation of a composite graft.

Donor bone was harvested according to industry accepted standards from a cadaver donor.
30 The composite bone grafts, sized as recorded in Table 1, were prepared according to the method
described as follows. Using a bandsaw cortical planks and pin segments were cut from a cortical
shaft. One surface of each cortical planks was smoothed on a planing table and the planks were cut
35 to the recorded thickness using a mill. Thereafter, using a table saw, the cut planks were cut to the
recorded width and length. Cortical pins were then cut using a drill press, from the pin segments.
40 Using a drill sander, the cortical pins were tapered sufficient to allow insertion into the reamed graft
unit. Next, using a bandsaw, cancellous wafers were cut from cancellous bone to the recorded
thickness. The wafers were then cut to the recorded width and length using a table saw. The cortical
45 planks and cancellous wafer were then assembled into a graft unit in a jig and were then reamed
using a drill press. The anterior through-hole was disposed through the width of the graft unit at the

through-hole's center point, 7.5 mm along the length of the graft unit, and centered relative to the width of the graft unit. Using an arbor press, the cortical pins were pushed into the reamed graft unit to produce a pinned graft unit. Any excess pin was then cut off using a bandsaw. Next, using a drill sander, the pinned graft unit was then shaped to the final recorded width, and if the composite graft was angled, the pinned graft was then milled to cut angles. The composite graft was milled to provide grooves of the recorded height, on the opposing surfaces as shown in the Figures. The produced composite bone grafts were then cleaned and tested as follows.

TABLE 1

Specimen number	Graft Type	Composite width (mm)	Tooth (mm)	Composite Height (mm)		Length (mm)	Pins (mm)		Cancellous* width (mm)	Cortical* width (mm)
				Height	angle		front	back		
1	trapezoid wedge(TA)	9.0	1.2	60.0°	8.0	10.0	21.0	2.5	3.0	3.0
2	trapezoid wedge(TB)	11.0	1.5	60.0°	10.0	12.0	21.0	3.0	3.0	3.0
3	trapezoid wedge(TC)	13.0	1.5	60.0°	12.0	14.0	21.0	3.0	3.0	4.0
4	trapezoid wedge(TD)	13.0	1.5	60.0°	12.0	14.0	21.0	3.0	3.0	4.0**
5	parallel block(PA)	7.0	1.2	60.0°	9.0	9.0	21.0	2.5	2.5	3.0
6	parallel block(PB)	9.0	1.2	60.0°	9.0	9.0	21.0	2.5	2.5	3.0
7	parallel block(PC)	9.0	1.2	60.0°	11.0	11.0	21.0	3.0	3.0	3.0
8	parallel block(PD)	9.0	1.2	60.0°	10.0	10.0	21.0	2.5	3.0	3.0
9	parallel block(PE)	11.0	1.5	60.0°	13.0	13.0	21.0	3.0	3.0	3.0
10	parallel block(PF)	11.0	1.5	60.0°	12.0	12.0	21.0	3.0	3.0	3.0
12	parallel block(PG)	13.0	1.5	60.0°	14.0	14.0	21.0	3.0	3.0	4.0**
11	parallel block(PH)	11.0	—	—	9.0	9.0	21.0	3.0	3.0	3.0
12	parallel block(PI)	11.0	—	—	9.0	9.0	21.0	3.0	3.0	4.0**
13	parallel block(PJ)	9.0	—	—	7.0	7.0	21.0	2.5	2.5	3.0

* +0.500 mm or - 0.250 mm

** two (2) cortical planks were used, each ~2.0 mm to give a composite cortical width of 4.0 mm

II. Biomechanical Strength

The biomechanical strength of the composite bone grafts recorded in Table 2 was determined using static compression testing. All of the tested bone grafts were produced as set forth in Example

5

10

15

l, and sized as recorded. All of the composite bone grafts were constructed from two cortical layers sandwiching a cancellous layer with all of the layers oriented parallel to the sagittal plane, and secured together with two cortical bone pins. Tests were performed under a compressive load using an Instron™ 4204 test machine. An axial displacement was applied in a ramp fashion at 2.5 mm/min rate until catastrophic failure of the bone graft occurred or until the maximum displacement of 3 mm was reached. Data was collected at a rate of 2 Hz.

20

As can be seen from the data set forth in Table 2, all of the composite grafts exhibited adequate to exceptional biomechanical strength, as compared to the vertebral body itself which fails at 10,000 N (2,200 lbs).

25

30

35

40

45

50

55

TABLE 2

Graft Type	Specimen number	Load at Max. Load (KN)	Displacement at Max. Load (Mm)	Load at z-slp, yield (Mm)	Displacement at z-slp, yield (Mm)	Stiffness (slope) (AutYoung) (N/mm)
PA (Donor 1)	PA-1	8.464	3.460	6.719	1.706	6708.0
	PA-2	8.923	2.450	8.625	1.957	6544.0
	PA-3	8.569	3.020	7.323	1.851	6201.0
	PA-4	7.238	3.070	6.727	1.998	4756.0
	PA-5	8.395	2.160	8.078	1.873	7321.0
Mean (Donor 1):		8.318	2.832	7.495	1.877	6306
Std. Dev. (Donor 1):		.637	.521	.842	.113	957
(Donor 2)	PA-6	9.718	3.300	6.636	1.560	5637.0
	PA-7	8.118	1.970	8.113	1.956	6379.0
	PA-8	11.190	3.150	9.052	2.102	6246.0
	PA-9	8.201	2.110	8.193	2.102	6643.0
	PA-10	5.992	1.430	5.882	1.248	7973.0
	PA-11	7.248	2.500	7.130	2.060	6578.0
	PA-12	8.319	2.660	8.228	2.123	6500.0
	PA-13	6.325	2.690	5.782	1.624	4518.0
	PA-14	7.973	1.770	7.970	1.749	5867.0
	PA-15	8.969	2.750	-	-	5546.0
Mean (Donor 2):		8.205	2.433	-	-	6189.0
Std. Dev. (Donor 2):		1.535	.601	-	-	900.0
(Donor 3)	PA-16	7.259	1.540	7.256	1.541	8207.0
(Donor 4)	PA-17	9.799	1.710	9.799	1.687	9930.0
	PA-18	7.879	1.640	7.876	1.623	7963.0
	PA-19	9.590	1.620	9.584	1.603	9794.0
	PA-20	9.388	1.670	9.380	1.665	8773.0
	PA-21	9.617	1.750	9.617	1.748	10260.0
Mean (Donor 4):		9.255	1.678	9.251	1.655	9344.0
Std. Dev. (Donor 4):		.783	.053	.783	.057	950
PC (Donor 5)	PC-1	9.165	4.000	7.216	1.811	10230.0
	PC-2	7.664	2.860	7.664	2.853	4291.0
	PC-3	8.360	2.810	8.338	2.791	4226.0
	PC-4	8.612	.970	8.607	.958	19260.0
Mean (Donor 5):		8.450	2.660	7.956	2.103	9503.0
Std. Dev. (Donor 5):		.623	1.254	.633	.900	7090.0
(Donor 6)	PC-5	10.45	2.040	10.36	1.540	9482.0
	PC-6	10.17	2.140	10.17	2.144	7261.0
	PC-7	11.74	2.090	11.73	2.060	10330.0
	PC-8	11.77	2.290	11.76	2.290	9123.0
Mean (Donor 6):		11.03	2.140	11.01	2.009	9049.0
Std. Dev. (Donor 6):		.84	.108	.86	.326	1295.0

TABLE 2 (cont.)

Graft Type	Specimen number	Load at Max. Load (KN)	Displacement at Max. Load (Mm)	Load at z-slp, yield (Mm)	Displacement at z-slp, yield (Mm)	Stiffness (slope) (AutYoung) (N/mm)
PB	PB-1	8.953	1.540	8.604	1.310	10160.0
(Donor 7)	PB-2	10.910	1.850	10.910	1.852	10380.0
Mean (Donor 7):		9.931	1.695	9.758	1.581	10270.0
Std. Dev. (Donor 7):		1.336	.219	1.632	.383	156.0
PE	PE-1	11.42	1.810	11.21	1.601	13900.0
(Donor 8)						

III. Comparative Biomechanical Strength

Composite bone grafts were produced as described in Example A. 11 x 9 x 21 mm grafts: (PH) having two 3.0 mm cortical layers sandwiching a 5.0 mm cancellous layer, and (PI) having two 4.0 mm cortical layers sandwiching a 3.0 mm cancellous layer; and 9 x 7 x 21 mm grafts (PJ) having two 3.0 mm cortical layers sandwiching a 3.0 mm cancellous layer, were produced. After production, the grafts were either fresh frozen or freeze-dried. Table 3 summarizes the compression test results of fresh frozen composite grafts after thawing in 9.0 % saline solution for 90 minutes and the freeze-dried composite bone grafts after soaking for 20 min., 60 min., and 7 days in 9.0 % saline solution.

Test results showed that the 20 minute soaked freeze-dried grafts had the highest strength (Table 3) and stiffness (Table 4) among all the tested groups. Generally, strength and stiffness of the fresh-frozen grafts were relatively lower than the freeze-dried grafts.

The inventive composite bone graft, both fresh-frozen and freeze-dried, when compared to commercially available bone graft products (Os™ and Mid America) was significantly stronger. See *Brantigan et al*, Compression Strength of Donor Bone for Posterior Lumbar Interbody Fusion, Spine Vol. 18, No. 9, 1993.

TABLE 3

Graft Type	Specimen Number					Mean	Std. Dev.
	1	2	3	4	5		
Fresh Frozen-one-hour (PH-1)	9.114	9.160	6.942	6.945	9.852	8.403	1.364
Fresh Frozen-one-hour (PH-2)	9.176	8.744	-	-	-	8.960	0.305
Freeze-dried-20.0 min. (PI-1)	13.970	14.460	-	-	-	14.220	0.346
Freeze-dried-one-hour (PI-2)	13.99	13.97	-	-	-	13.98	0.014
Freeze-dried-seven-days (PI-3)	10.300	8.255	-	-	-	9.277	1.446
Fresh Frozen-one-hour (PJ-1)	7.925	7.973	8.958	7.836	9.799	8.498	.985
Fresh Frozen-one-hour (PJ-2)	8.897	9.015	-	-	-	8.956	.083
Os™ *	1.098	.934	5.72	2.145	-	2.474	2.229
Mid America Tricortical **	2.823	1.699	1.926	2.629	2.464	2.308	0.477

* Os™ bone is a commercial tricortical bone graft product.

** Mid America tricortical is a commercially available bone graft product produced by Mid America.

TABLE 4

Graft Type	Specimen Number					Mean	Std. Dev.
	1	2	3	4	5		
Fresh Frozen-one-hour (PJ-1) (9x7, 3-3-3)	7053.0	6176.0	5878.0	5434.0	7528.0	6413.8	1103.4
Fresh Frozen-one-hour (PJ-2) (9x7, 3-3-3)	7303.0	6112.0	-	-	-	6707.5	842.2
Fresh Frozen-one-hour (PH-1) (11x9, 3-5-3)	10980.0	13900.0	-	-	-	12440.0	2064.8
Fresh Frozen-one-hour (PH-2) (11x9, 3-5-3)	4938.0	11340.0	11060.0	12180.0	9125.0	9728.0	2902.3
Freeze-dried-20.0 min. (PI-1) (11x9, 4-3-4)	27760.0	28420.0	-	-	-	28090.0	466.7
Freeze-dried-one-hour (PI-2) (11x9, 4-3-4)	21940.0	22890.0	-	-	-	22415.0	671.8
Freeze-dried-seven-days (PI-3) (11x9, 4-3-4)	14590.0	18130.0	-	-	-	16360.0	2503.2

IV. Preparation of a cervical wedge composite graft.

Donor bone was harvested according to industry accepted standards from a cadaver donor. The composite bone grafts, sized as recorded in Table 5, were prepared according to the method described as follows. Using a bandsaw cortical planks and pin segments were cut from a cortical shaft. One surface of each cortical planks was smoothed on a planing table and the planks were cut to the required thickness using a mill. Thereafter, using a table saw, the cut planks were cut to the required width and length. Cortical pins were then cut using a drill press, from the pin segments. Using a drill sander, the cortical pins were tapered sufficient to allow insertion into the reamed graft unit. Next, the cortical planks were assembled into a graft unit in a jig and were then reamed using a drill press. Using an arbor press, the cortical pins were pushed into the reamed graft unit to produce a pinned unit. At this point, the pinned unit was optionally sloped at it's top and/or bottom

surface, for example at its bottom surface, at 7° using a radial saw. A circular shape was then cut through the pinned and optionally sloped unit using a trephine or Cloward cutter of appropriate size. Thereafter, using a radial saw or a band saw, the sides and bottom of the graft were shaped, and a centrally located hole was drilled through the pinned unit. Any excess pin was then cut off using a bandsaw. Lastly, the pinned graft unit was smoothed. If textured, the composite graft was milled to provide grooves on the opposing surfaces as shown in Figure 35.

TABLE 5

Specimen number	Graft Type	Composite Width(mm)		Diameter (Mm)	Width (Mm)
		Front	back		
1	Cervical Wedge (CA)	6.0	10.0	13.0	16.0
2	Cervical Wedge (CB)	7.0	11.0	13.0	16.0
3	Cervical Wedge (CC)	8.0	12.0	13.0	16.0
4	Cervical Wedge (CD)	6.0	10.0	15.0	19.0
5	Cervical Wedge (CE)	7.0	11.0	15.0	19.0
6	Cervical Wedge (CF)	8.0	12.0	15.0	19.0
7	Cervical Wedge (CG)	6.0	6.0	13.0	16.0
8	Cervical Wedge (CH)	8.0	8.0	13.0	16.0
9	Cervical Wedge (CI)	6.0	6.0	15.0	19.0
10	Cervical Wedge (CJ)	7.0	7.0	13.0	16.0
11	Cervical Wedge (CK)	7.0	7.0	15.0	19.0

It is to be understood, however, that the scope of the present invention is not to be limited to the specific embodiments described above. The invention may be practiced other than as particularly described and still be within the scope of the accompanying claims.

Claims

5

10

15

20

25

30

35

40

45

50

55

5

WE CLAIM:

10

1. A composite bone graft, comprising: a plurality of bone portions layered to form a graft unit, and one or more biocompatible connectors for holding together said graft unit, said biocompatible connectors do not comprise an adhesive.

15

2. A composite bone graft comprising:
two or more distinct bone portions, and
one or more biocompatible connectors, wherein said biocompatible connectors hold together said two or more bone portions to form said composite bone graft, said biocompatible connectors do not comprise an adhesive.

20

25

3. A composite bone graft comprising two or more connected, distinct, bone portions, said connected, distinct, bone portions do not comprise an adhesive.

30

4. A composite bone graft comprising three or more connected, distinct, bone portions, said connected, distinct, bone portions are not connected with an adhesive.

35

5. The composite bone graft of any one of claims 1 or 2, said bone portions are selected from the group consisting of: cortical bone and cancellous bone.

40

6. A composite bone graft, comprising:
a first bone portion;
a second bone portion;
a third bone portion, said first, second and third bone portions are layered to form a graft unit; and

45

one or more biocompatible connectors for holding together said graft unit, said biocompatible connectors do not comprise an adhesive.

50

55

5

7. A composite bone graft, comprising:

a first cortical bone portion;

10

a second cortical bone portion;

a cancellous bone portion disposed between said first cortical bone portion and said

15

second cortical bone portion to form a graft unit; and

one or more biocompatible connectors for holding together said graft unit, said biocompatible connectors do not comprise an adhesive.

20

8. A composite bone graft, comprising:

a first cortical bone portion;

25

a second cortical bone portion provided on said first cortical bone to form a graft

unit; and

one or more biocompatible connectors, connecting said graft unit, said biocompatible

30

connectors do not comprise an adhesive.

9. A composite bone graft, comprising:

a first bone portion;

35

a second bone portion provided on said first bone portion to form a graft unit; and

one or more biocompatible connectors for holding together said graft unit, said

40

biocompatible connectors do not comprise an adhesive.

10. A composite bone graft, comprising: a plurality of cortical bone portions layered to

form a graft unit, and one or more biocompatible connectors for holding together said

45

graft unit, said biocompatible connectors do not comprise an adhesive.

50

55

5

11. A composite bone graft, comprising:

one or more cortical bone portions layered to form a first unit;

10

one or more cortical bone portions layered to form a second unit;

one or more cancellous bone portions layered to form a third unit; said third unit

15

disposed between said first unit and said second unit to form a graft unit; and

one or more biocompatible connectors for holding together said graft unit, said biocompatible connectors do not comprise an adhesive.

20

12. The composite bone graft of any one of claims 1, 2, or 11, said biocompatible connectors comprising one or more mechanical biocompatible connectors.

25

13. The composite bone graft of any one of claims 1, 2, or 11, said biocompatible connectors comprising a chemical biocompatible connector, said chemical biocompatible connector does not comprise an adhesive.

30

14. The composite bone graft of claim 12, said mechanical biocompatible connectors comprise one or more pins.

35

15. The composite bone graft of claim 12, wherein said mechanical biocompatible connectors comprise one or more biocompatible materials selected from the group consisting of: cortical bone; stainless steel; titanium; cobalt-chromium-molybdenum alloy; a plastic of one or more members selected from the group consisting of: nylon, polycarbonate, polypropylene, polyacetal, polyethylene, and polysulfone; and one or more bioabsorbable polymers.

40

16. The composite bone graft of any one of claims 1-4, 6-9, or 10, said bone portions are configured to provide an interlocking fit between adjacent bone portions.

45

85

SUBSTITUTE SHEET (RULE 26)

55

5

10

15

20

25

30

35

40

45

50

17. The composite bone graft of claim 15, said one or more bioabsorbable polymers selected from the group consisting of: poly(galactic acid), poly(lactic acid) and copolymers thereof.
18. The composite bone graft of claim 15, said mechanical biocompatible connector further comprising one or more therapeutically beneficial agents.
19. The composite bone graft of claim 18, said therapeutically beneficial agents selected from the group consisting of: an osteoinductive substance, an anti-inflammatory agent, an antibiotic, a growth factor, and a chemotherapeutic substance.
20. The composite bone graft of claim 15, wherein said one or more mechanical biocompatible connectors comprise cortical bone.
21. The composite bone graft of claim 20, wherein cortical bone mechanical connectors comprises one or more cortical bone pins.
22. The composite bone graft of claim 14, wherein said one or more pins comprise one or more cortical bone pins.
23. The composite bone graft of any one of claims 14, 21, or 22, wherein said graft unit comprises one or more through-holes configured to accommodate said one or more pins.
24. The composite bone graft of claim 23, said through-holes are disposed perpendicular to interfaces of bone portions of said graft unit.
25. The composite bone graft of claim 24, wherein said one or more pins and said through-holes are configured to provide an interference fit for holding together said graft unit.

55

- 5
- 10
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
26. The composite bone graft of claim 25, wherein said one or more through-holes and said one or more pins are round and an inner diameter of a through-hole is smaller than a diameter of a pin, to provide an interference fit between said through-hole and said pin.
27. The composite bone graft of claim 21, said one or more cortical bone pins comprising a plurality of vertical groves provided on a surface thereof.
28. The composite bone graft of claim 21, said one or more cortical bone pins comprising a roughened surface.
29. The composite bone graft of claim 21, said one or more cortical bone pins further comprising a slot extending from one end of said bone pin.
30. The composite bone graft of claim 22, said one or more cortical bone pins further comprising a slot extending from one end of said bone pin.
31. The composite bone graft of claim 23, wherein said one or more pins is threaded to provide a threaded engagement with said one or more through-holes.
32. The composite bone graft of claim 31, wherein said one or more pins is threaded and said one or more through-holes is threaded, to provide a threaded engagement between said one or more pins and said one or more through-holes.
33. The composite bone graft of claim 23, wherein said one or more pins and said one or more through-holes are configured to provide a slidable connection.
34. The composite bone graft of claim 23, wherein a cross-section of said one or more pins comprises a shape selected from the group consisting of: round, ovoid, square, rectangular, triangular, pentagon, hexagon, and trapezoidal.

5

10

15

20

25

30

35

40

45

50

55

35. The composite bone graft of any one of claims 1, 2, or 11, said composite bone graft comprising a member selected from the group consisting of: a parallelepiped; a parallel block; a square block; a trapezoid wedge; a cylinder; a tapered cylinder; a flattened curved wedge, and a polyhedron.
36. A composite bone graft, comprising:
a graft unit having one or more through-holes configured to accommodate one or more pins, said graft unit comprising:
two or more bone portions layered to form said graft unit, and
one or more pins connecting bone portions of said graft unit, said composite bone graft does not comprise an adhesive.
37. The composite bone graft of claim 36, said one or more pins comprising one or more biocompatible materials selected from the group consisting of: cortical bone; stainless steel; titanium; cobalt-chromium-molybdenum alloy; a plastic of one or more members selected from the group consisting of: nylon, polycarbonate, polypropylene, polyacetal, polyethylene, and polysulfone; and one or more bioabsorbable polymers.
38. The composite bone graft of claim 37, said two or more bone portions comprising:
a first bone portion comprising one or more cortical bone portions;
a second bone portion comprising one or more cortical bone portions; and
a third bone portion comprising one or more cancellous bone portions disposed between said first bone portion and said second bone portion to form said graft unit.

5

39. The composite bone graft of claim 38, said one or more pins comprise one or more cortical bone pins.

10

40. A composite bone graft, comprising:
a graft unit having one or more through-holes configured to accomadate one or more pins, said graft unit comprising:

15

a first plate-like cortical bone portion;

a second plate-like cortical bone portion;

20

a plate-like cancellous bone portion disposed between said first plate-like cortical bone portion and said second plate-like cortical bone portion to form said graft unit, and

25

one or more cortical bone pins connecting bone portions of said graft unit, said composite bone graft does not comprise an adhesive.

30

41. A composite bone graft, comprising:
a graft unit having one or more through-holes configured to accomadate one or more pins, said graft unit comprising:

35

a first plate-like bone portion;

a second plate-like bone portion provided on said first plate-like bone to

40

form said graft unit, and

one or more bone pins for holding together said graft unit, said composite

45

bone graft does not comprise an adhesive.

50

89

SUBSTITUTE SHEET (RULE 26)

55

5

10

15

20

25

30

35

40

45

50

55

42. The composite bone graft of any one of claims 36, 40 or 41, said one or more through-holes are disposed perpendicular to interfaces of bone portions of said graft unit.
43. The composite bone graft of claim 42, wherein said one or more pins and said one or more through-holes are configured to provide an interference fit for holding together said graft unit.
44. The composite bone graft of claim 43, wherein said one or more through-holes and said one or more pins are round and an inner diameter of a through-hole is smaller than a diameter of a pin, to provide an interference fit between said through-hole and said pin.
45. The composite bone graft of claim 42, wherein said one or more pins and said one or more through-holes are configured to provide a slidable connection.
46. The composite bone graft of any one of claims 36, 40, or 41, said composite bone graft comprising a member selected from the group consisting of: a parallelepiped; a parallel block; a square block; a trapezoid wedge; a cylinder; a flattened curved block, a tapered cylinder; and a polyhedron.
47. The composite bone graft of claim 46, said composite bone graft is a polyhedron.
48. The composite bone graft of claim 46, said composite bone graft further comprising: one or more textured surfaces.
49. The composite bone graft of claim 48, said one or more textured surfaces comprising: a plurality of closely spaced continuous protrusions.

- 5
- 10
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
50. The composite bone graft of claim 49, wherein said continuous protrusions comprise a cross-section having one or more shapes selected from the group consisting of: irregular; triangular, square, rectangular, and curved.
51. The composite bone graft of claim 49, wherein said plurality of continuous protrusions are sized to be in a range of greater than or equal to 1.5 mm in length; 0.5 to about 10.0 mm in width and 0.1 to about 5.0 mm in depth.
52. The composite bone graft of claim 51, wherein said plurality of closely spaced continuous protrusions are spaced from about 0.0 to about 3.0 mm apart.
53. A method for restoring vertical support of the posterior column, comprising implanting a composite bone graft comprising two or more distinct bone portions held together by one or more biocompatible connectors, at a site in a patient.
54. The composite bone graft of claim 36, said composite bone graft comprising a flattened curved wedge having a centrally located through-hole disposed perpendicular to interfaces of bone portions of said graft unit.
55. A composite bone graft, comprising:
a graft unit having one or more through-holes configured to accommodate one or more pins, said graft unit comprising:
two or more bone portions layered to form said graft unit,
one or more pins connecting said bone portions of said graft unit, and
a centrally located through-hole disposed perpendicular to interfaces of layered bone portions of said graft unit, said composite bone graft does not comprise an adhesive.

5

56. A method for making a composite bone graft for implantation into a patient, comprising:

10

stacking two or more parallel bone planks to form a graft unit;

providing one or more through-holes in said graft unit perpendicular to interfaces of bone planks;

15

connecting said two or more parallel bone planks of said graft unit with one or more pins disposed in said one or more through-holes to form a pinned graft unit;

20

and

shaping said pinned graft unit to form said composite bone graft.

25

57. The composite bone graft of any one of claims 1, 2, 11, 36, 54, or 55, wherein said composite bone graft comprises one or more members selected from the group consisting of: human and animal bone.

30

58. The composite bone graft of any one of claims 1, 2, 11, 36, 54, or 55, wherein said composite bone graft is an allograft or xenograft.

35

59. The composite bone graft of any one of claims 1, 2, 11, 36, 54, or 55, wherein one or more of said bone portions comprise a demineralized bone portion.

60. The composite bone graft of claim 59, wherein said demineralized bone portion comprises a discontinuous demineralized bone portion.

40

61. The composite bone graft of claim 60, wherein said discontinuous demineralized bone portion comprises cancellous bone or cortical bone.

45

62. The composite bone graft of any one of claims 1, 2, 11, 36, 54, or 55, wherein one or more of said bone portions comprise a discontinuous bone portion.

50

55

5

10

NOT FURNISHED UPON FILING (CLAIMS 63-67)

15

20

25

30

35

40

45

50

55

5

10

15

20

25

30

35

40

45

50

55

68. The composite bone graft of claim 65, said pharmaceutically active agent comprising one or more members selected from the group consisting of: a growth factor, a chemotherapeutic agent, an anti-inflammatory agent, and an antibiotic.

69. The composite bone graft of any one of claims 67 or 68, said growth factor comprising one or more members selected from the group consisting of: bone morphogenic protein, and transforming growth factor- β .

70. A composite bone graft, comprising:
one or more cortical bone portions layered to form a first unit;
one or more cortical bone portions layered to form a second unit;
one or more demineralized cancellous bone portions layered to form a third unit; said third unit disposed between said first unit and said second unit to form a graft unit; and
one or more biocompatible connectors for holding together said graft unit, said biocompatible connectors do not comprise an adhesive.

71. A composite bone graft, comprising:
one or more cortical bone portions layered to form a first unit;
one or more cortical bone portions layered to form a second unit;
one or more demineralized cortical bone portions layered to form a third unit; said third unit disposed between said first unit and said second unit to form a graft unit; and
one or more biocompatible connectors for holding together said graft unit, said biocompatible connectors do not comprise an adhesive.

- 5
72. The composite bone graft of claim 71, said one or more demineralized cortical bone portions comprising one or more discontinuous, demineralized cortical bone portions.
- 10
73. The composite bone graft of claim 70, said one or more demineralized cancellous bone portions comprising one or more perforated, demineralized cancellous bone portions
- 15
74. The composite bone graft of claim 72, said one or more discontinuous, demineralized cortical bone portions comprising one or more therapeutically beneficial agents.
- 20
75. The composite bone graft of claim 70, said one or more cancellous bone portions comprising one or more therapeutically beneficial agents.
- 25
76. A composite bone graft, comprising:
a first unit comprising one or more bone portions;
a second unit connected to said first unit, comprising one or more bone portions; and
one or more biocompatible connectors for connecting said first unit and said second unit, wherein said first unit and said second unit are not in physical contact
and define a void therebetween, said biocompatible connectors do not
comprise an adhesive.
- 30
77. The composite bone graft of claim 76, wherein said biocompatible connectors comprise one or more mechanical connectors.
- 40
78. The composite bone graft of claim 77, said one or more mechanical connectors comprising one or more cortical bone pins.
- 45

5

10

15

20

25

30

35

40

45

50

55

79. The composite bone graft of claim 76, further comprising one or more therapeutically beneficial substances disposed in said void and located between and in physical contact with said first unit and said second unit.

80. The composite bone graft of claim 79, said therapeutically beneficial substances comprising one or more members selected from the group consisting of: osteoinductive materials; osteoconductive materials; and pharmaceutically active agents.

81. The composite bone graft of claim 80, said osteoconductive materials comprising one or more biocompatible matrix materials selected from the group consisting of: demineralized cortical bone, demineralized cancellous bone, discontinuous demineralized cortical bone, discontinuous cortical bone, collagen, cancellous bone, hydroxyapatite; polymeric matrix materials; bioglass; bioceramics; resorbable Biomaterials; bioabsorbable polymers; a plastic matrix; stainless steel; titanium; and cobalt-chromium-molybdenum alloy matrix.

82. The composite bone graft of claim 80, said osteoinductive materials comprising one or more members selected from the group consisting of: autograft bone; allograft bone; demineralized cortical bone; demineralized cancellous bone; discontinuous demineralized cortical bone; collagen comprising one or more growth factors; collagen comprising demineralized bone; cancellous bone; cortical bone; and growth factors.

- 5
83. The composite bone graft of claim 80, said pharmaceutically active agent comprising
one or more members selected from the group consisting of: a growth factor, a
10 chemotherapeutic agent, an anti-inflammatory agent, and an antibiotic.
84. The composite bone graft of any one of claims 82 or 83, said growth factor
comprising one or more members selected from the group consisting of: bone
15 morphogenic protein, and transforming growth factor- β .
85. The composite bone graft of claim 80, comprising said one or more osteoinductive
substances and one or more osteoconductive substances, wherein said one or more
20 osteoinductive substances are disposed within a matrix of said one or more
osteoconductive substances.
86. The composite bone graft of any one of claims 2 or 3, said bone portions comprising
two or more cortical bone portions layered to form a graft unit.
87. The composite bone graft of claim 86, said cortical bone portions comprising
30 complementary patterns provided thereon to enable an interlocking fit between
adjacent cortical bone portions.
88. The composite bone graft of claim 86, further comprising: one or more channels
selected from the group consisting of: a vertically disposed channel, a horizontally
35 disposed channel, and a randomly disposed channel.
89. The composite bone graft of claim 88, said one or more channels further comprising:
one or more therapeutically beneficial substances.
90. A composite bone graft, comprising: two or more distinct interlocking cortical bone
45 portions.

- 5
91. The composite bone graft of claim 90, said two or more distinct interlocking bone
portions are each provided with complementary discrete or continuous interlocking
10 patterns.
92. A composite bone graft, comprising: two or more distinct adjacent bone portions
where adjacent bone portions are configured to interlock with each other.
15
93. A composite bone graft, comprising: two or more distinct adjacent bone portions
where adjacent bone portions are configured to interlock with each other, and one or
20 more locking pins partially or entirely traversing a dimension of said composite bone
graft.
94. The composite bone graft of claim 93, wherein said dimension comprises length,
25 width, or height.
95. A composite bone graft, comprising: two or more distinct adjacent bone portions
where adjacent bone portions are configured to interlock with each other to form an
interlocked graft unit, said interlocked graft unit is self-locking.
30
96. A composite bone graft, comprising: two or more distinct adjacent bone portions,
35 said distinct adjacent bone portions comprising complementary peg-like protrusions
and corresponding depressions, said protrusions and depressions interlock to provide
an interlocking fit between said adjacent bone portions.
40
97. The composite bone graft of claim 96, further comprising: one or more locking pins
partially or entirely traversing a dimension of said composite bone graft.
45
98. The composite bone graft of anyone of claims 92, 93, 95, or 96, said two or more
distinct adjacent bone portions comprise one or more members selected from the

5

group consisting of: cortical bone and cancellous bone.

10

99. The composite bone graft of claim 98, said two or more distinct adjacent interlocking bone portions comprise cortical bone.

15

100. A composite bone graft, consisting essentially of: two or more distinct adjacent bone portions where adjacent bone portions are configured to interlock with each other.

20

101. A composite bone graft, consisting essentially of: two or more distinct adjacent bone portions, said distinct adjacent bone portions comprising complementary peg-like protrusions and corresponding depressions, said protrusions and depressions interlock to provide an interlocking fit between said adjacent bone portions.

25

102. A composite bone graft, consisting essentially of: two or more distinct adjacent bone portions, said distinct adjacent bone portions comprising complementary peg-like protrusions and corresponding depressions, said protrusions and depressions interlock to provide an interlocking fit between said adjacent bone portions; and one or more locking pins partially or entirely traversing a dimension of said composite bone graft.

30

35

103. A composite bone graft, consisting essentially of: two or more distinct adjacent bone portions where adjacent bone portions are configured to interlock with each other, and one or more locking pins partially or entirely traversing a dimension of said composite bone graft.

40

45

104. The method of claim 57, said two or more parallel bone planks comprising two or more parallel bone planks configured to interlock with each other.

50

55

5

105. The composite bone graft of claim 90, said two or more distinct interlocking bone portions are each provided with complementary discrete interlocking patterns.

10

106. The composite bone graft of claim 105, said discrete interlocking patterns comprising: peg-like protrusions provided on a bone portion and corresponding depressions provided on an adjacent bone portion, said protrusions and depressions interlock to provide an interlocking fit between said adjacent bone portions.

15

107. A composite bone graft, comprising: two or more distinct adjacent bone portions where adjacent bone portions are configured to interlock with each other to form an interlocked graft unit, and one or more locking pins traversing a dimension of said composite bone graft, to lock said interlocked graft unit.

20

108. A composite bone graft, comprising: two or more distinct interlocking bone portions, said interlocking bone portions are self-locking.

25

109. A composite bone graft, comprising: two or more distinct interlocking bone portions, and one or more locking pins to lock said interlocking bone portions.

30

35

40

45

50

100

SUBSTITUTE SHEET (RULE 26)

55

1/22

FIG. 1

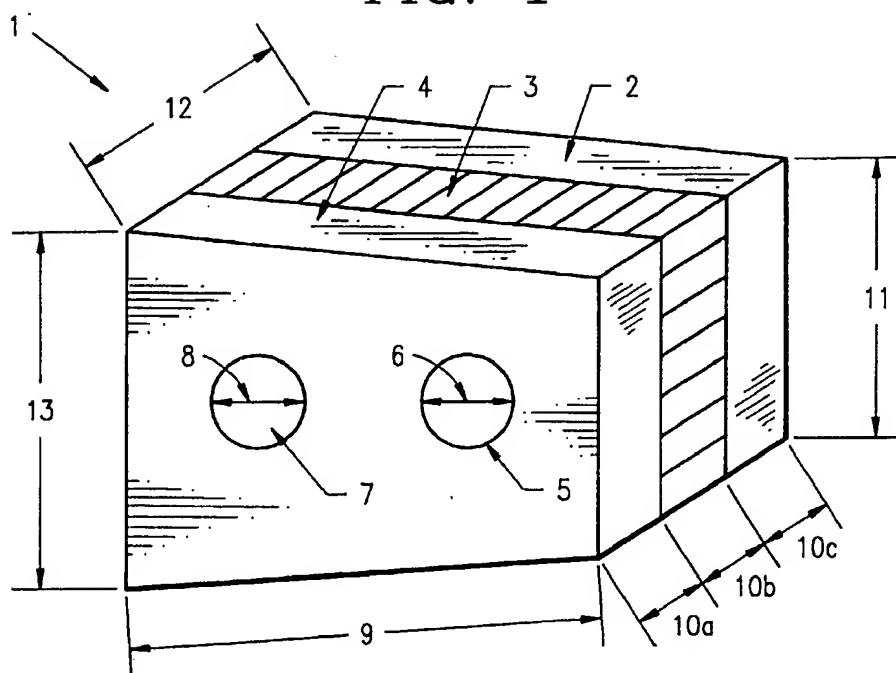


FIG. 2

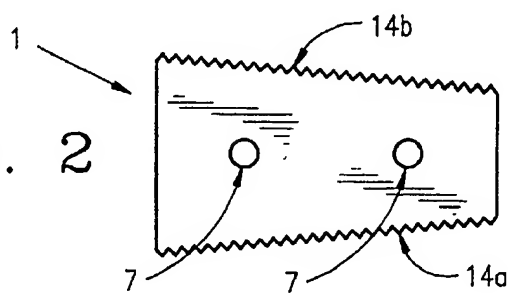


FIG. 3


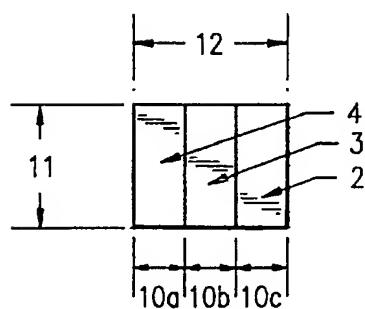


FIG. 4



Figures

NOT FURNISHED UPON FILING

5 → 10

3/22

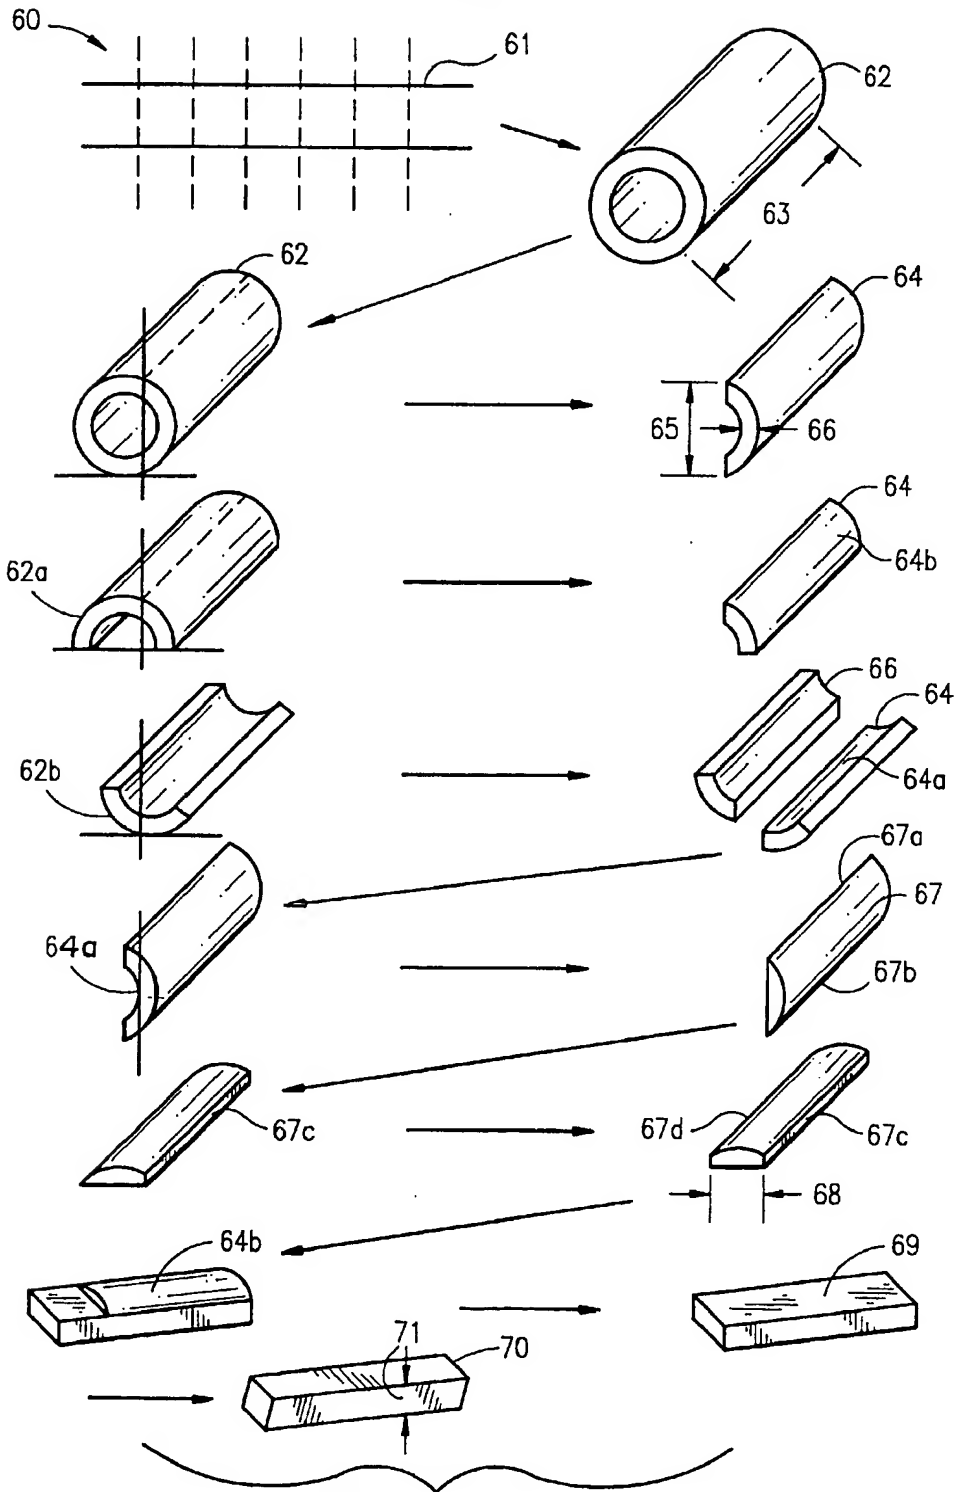


FIG. 11A
SUBSTITUTE SHEET (RULE 26)

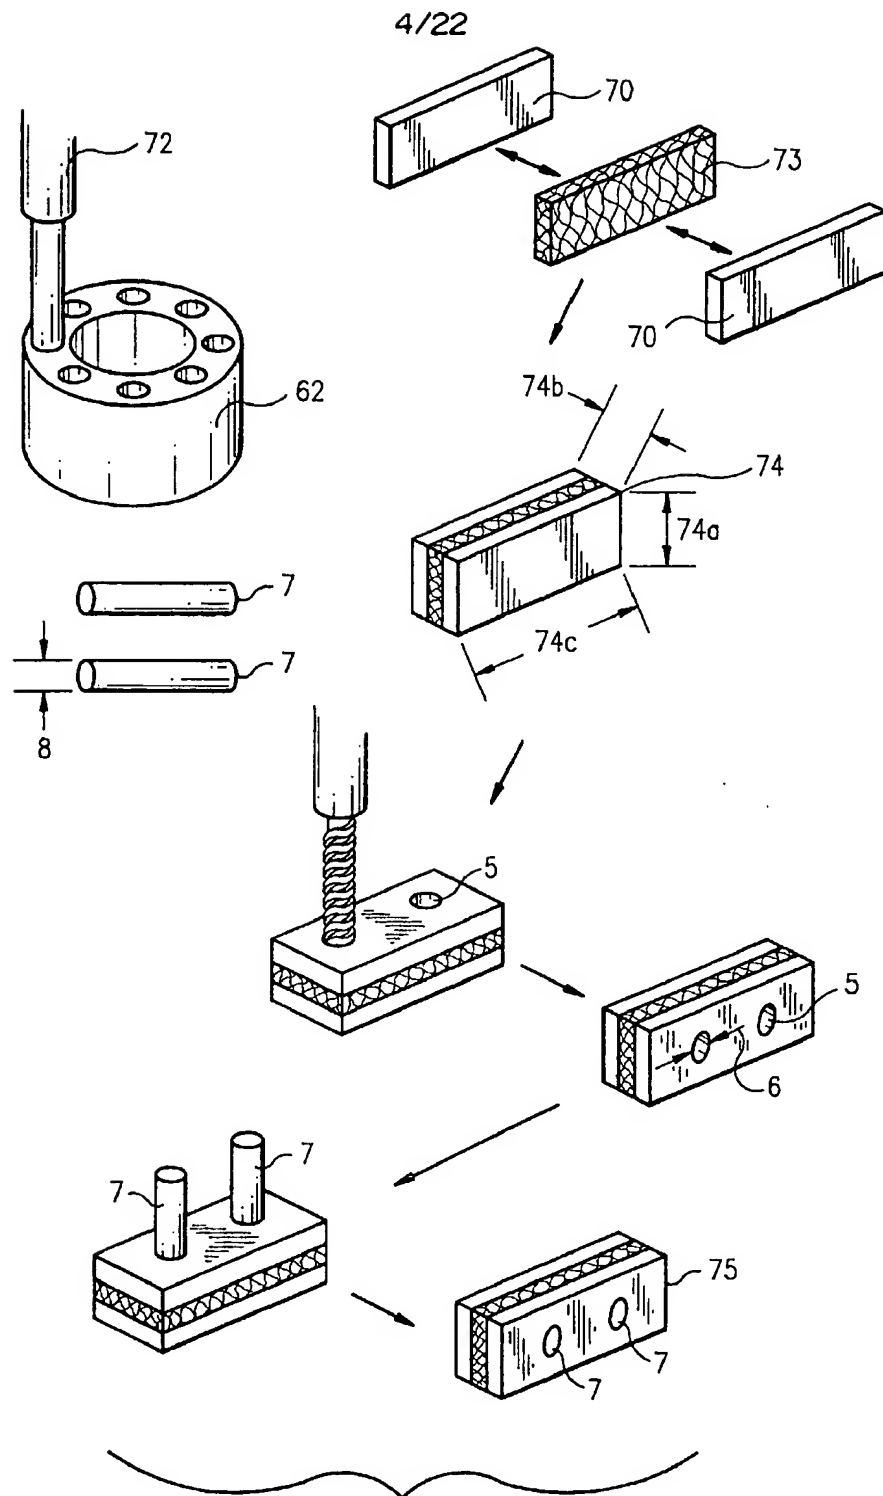


FIG. 11B
SUBSTITUTE SHEET (RULE 26)

5/22

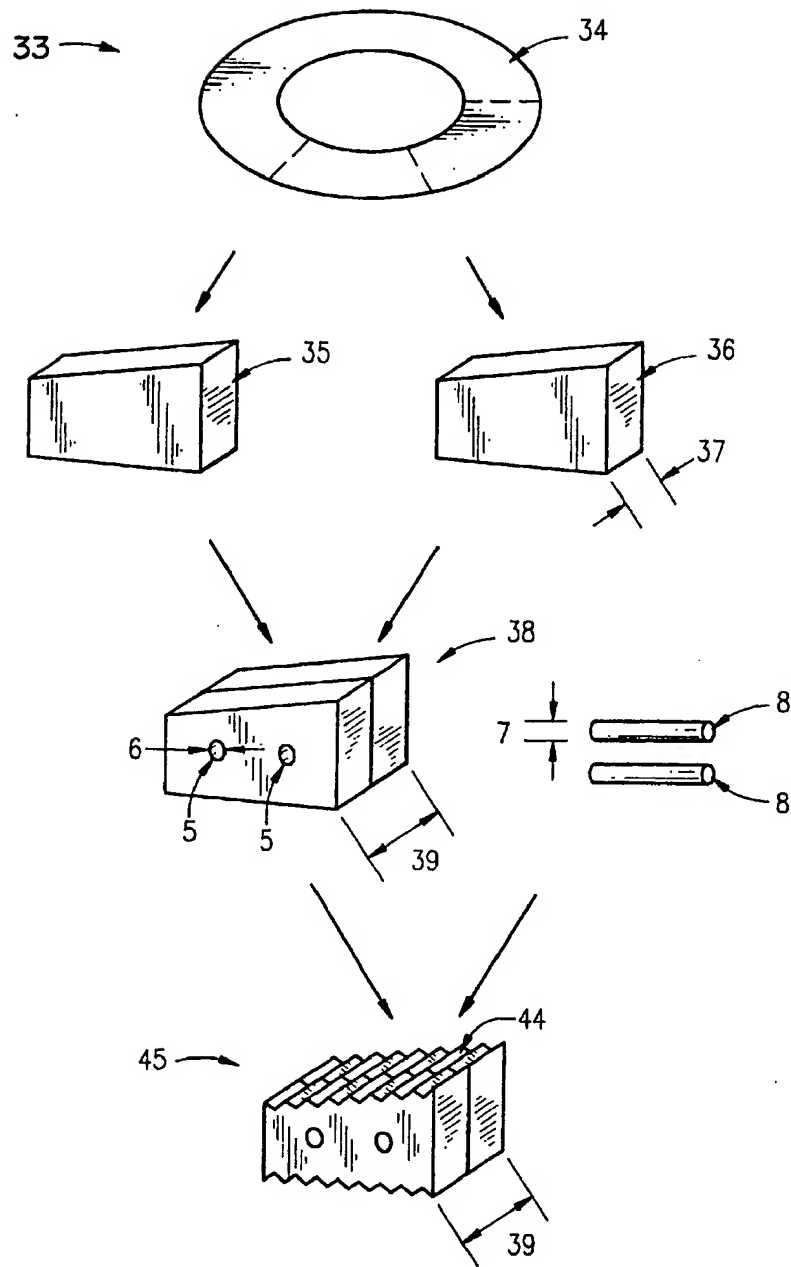


FIG. 12

SUBSTITUTE SHEET (RULE 26)

6/22

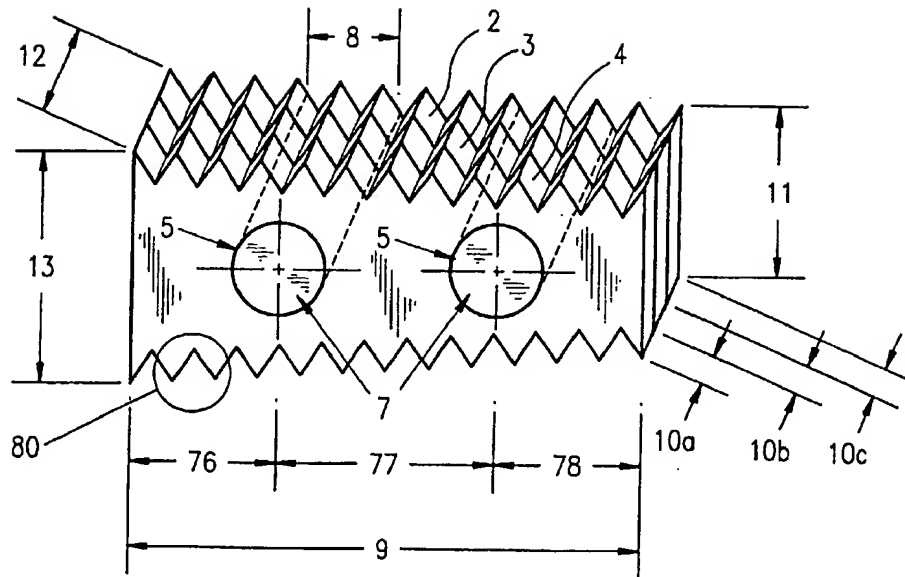


FIG. 13A

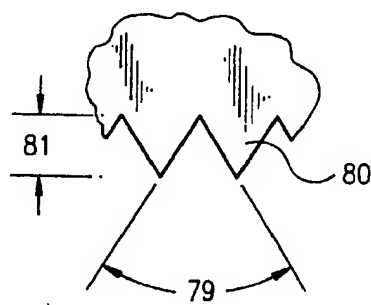


FIG. 13B

7/22

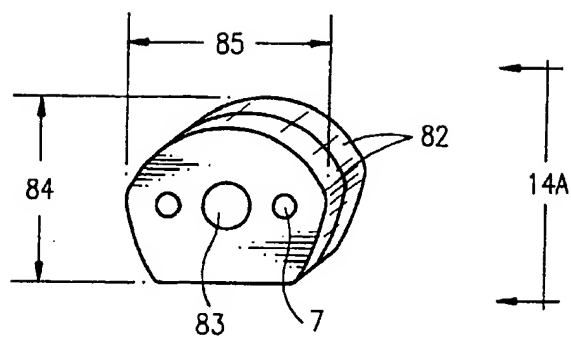


FIG. 14A

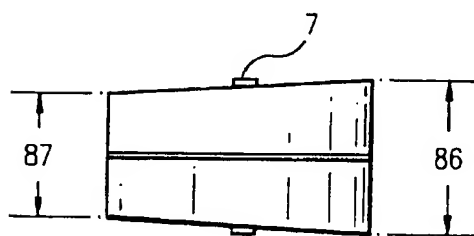


FIG. 14B




FIG. 14C

8/22

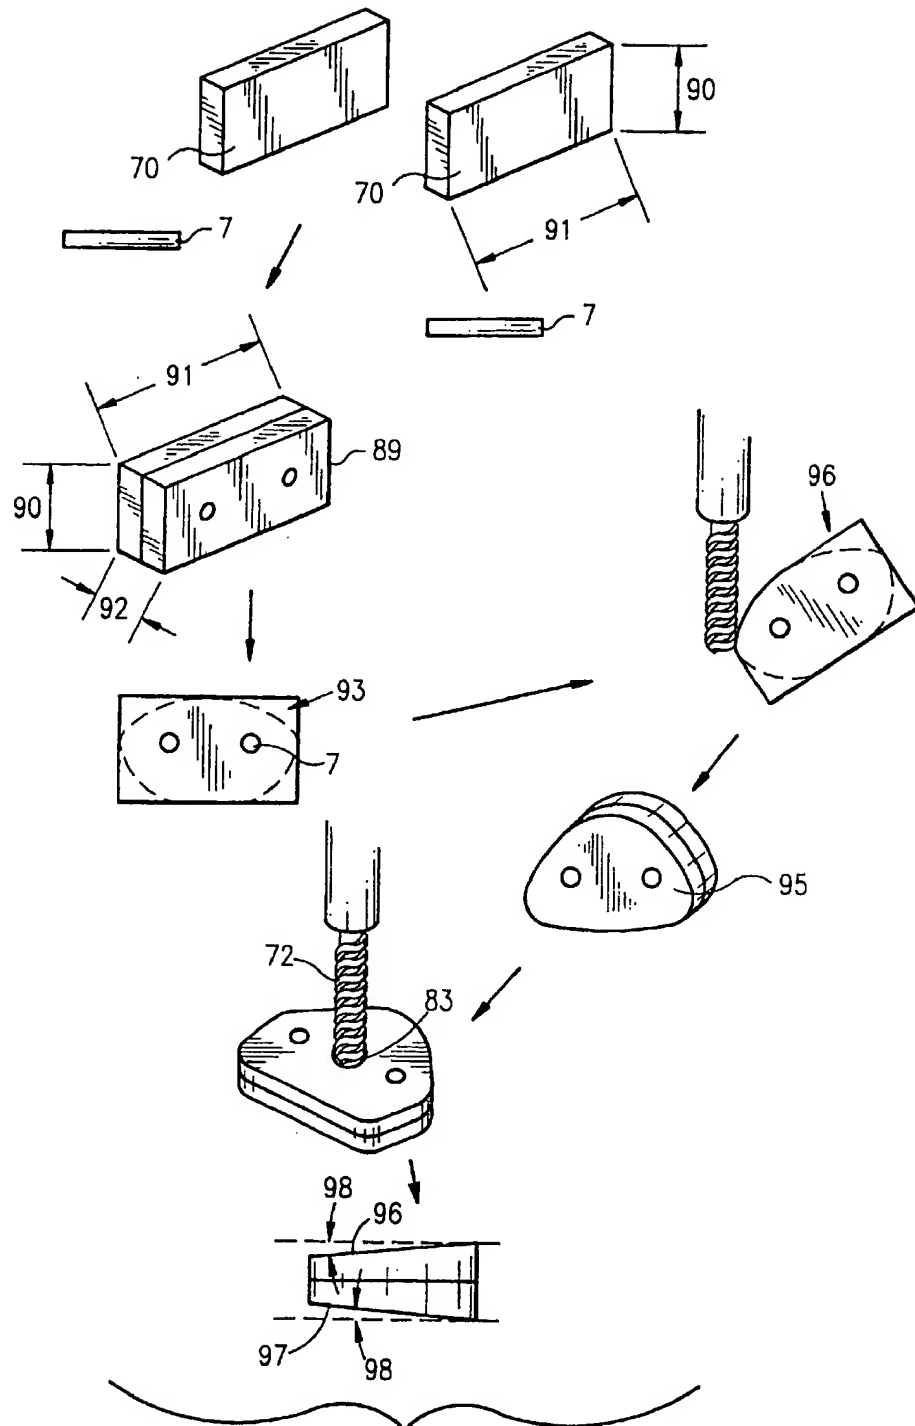


FIG. 15

SUBSTITUTE SHEET (RULE 26)

9/22




FIG. 16




FIG. 17




FIG. 18




FIG. 19




FIG. 20




FIG. 21




FIG. 22




FIG. 23




FIG. 24




FIG. 25




FIG. 26

SUBSTITUTE SHEET (RULE 26)

10/22

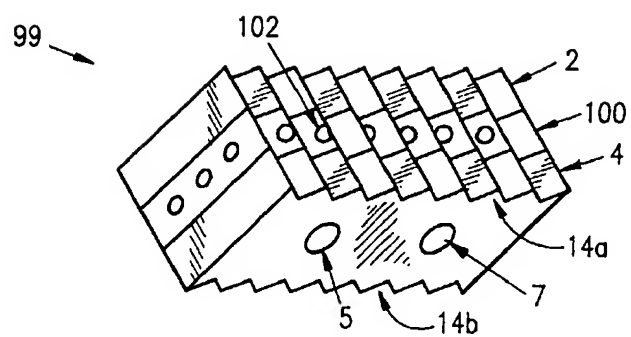


FIG. 27

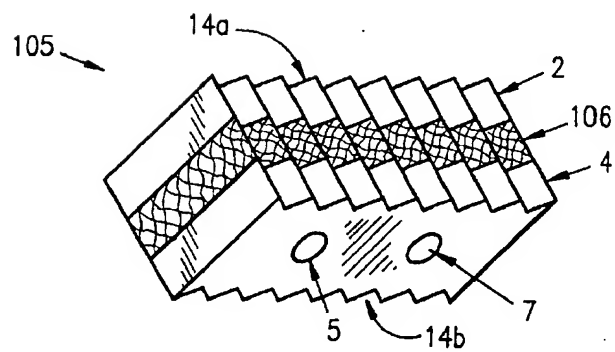


FIG. 28

11/22

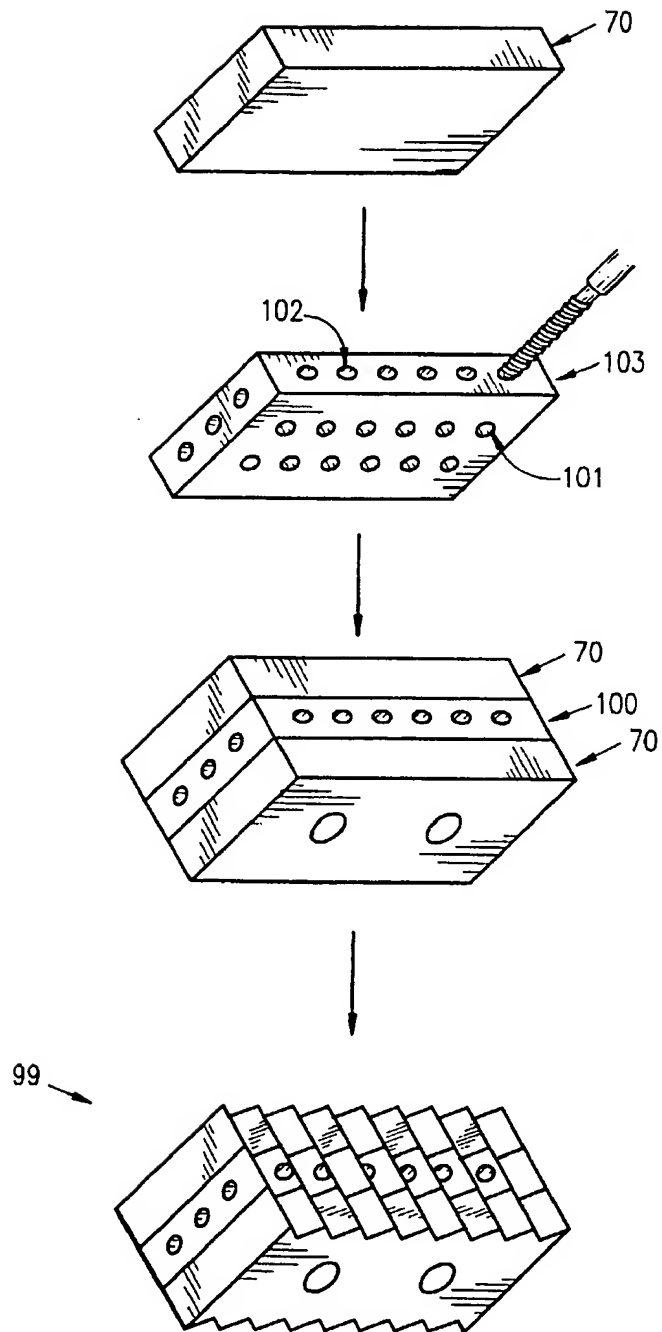


FIG. 29

SUBSTITUTE SHEET (RULE 26)

12/22

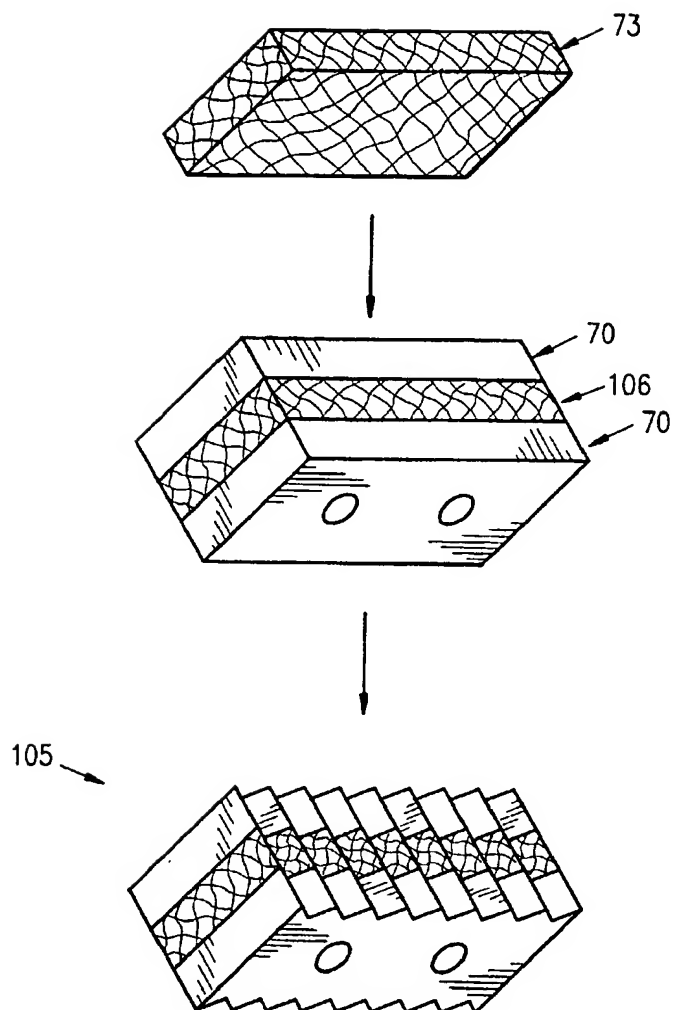


FIG. 30

13/22

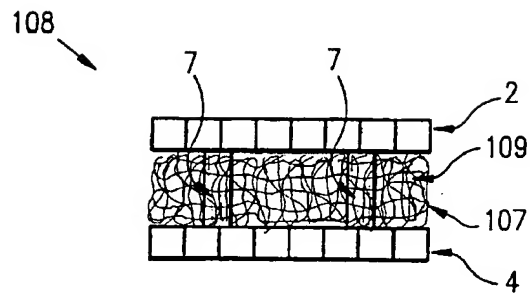


FIG. 31A

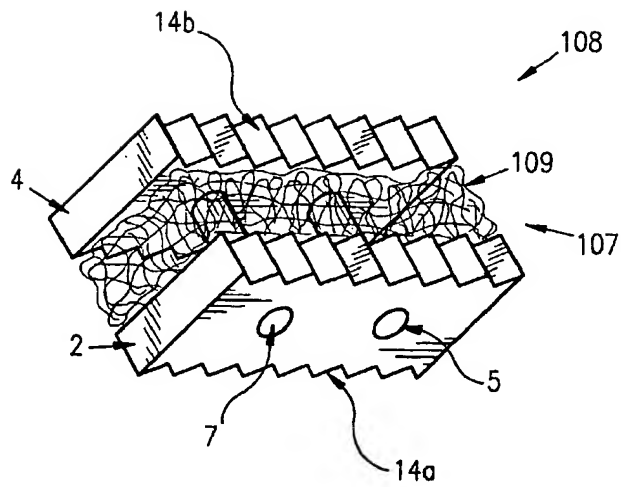


FIG. 31B

14/22

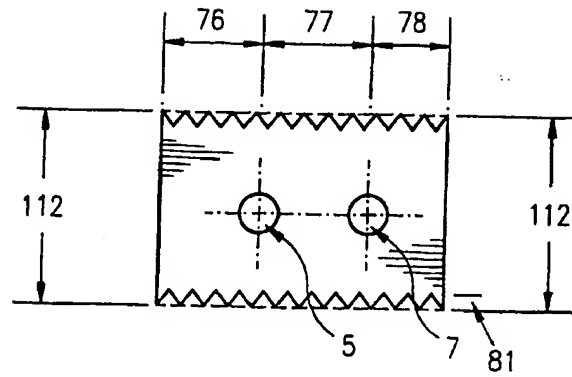


FIG. 32A

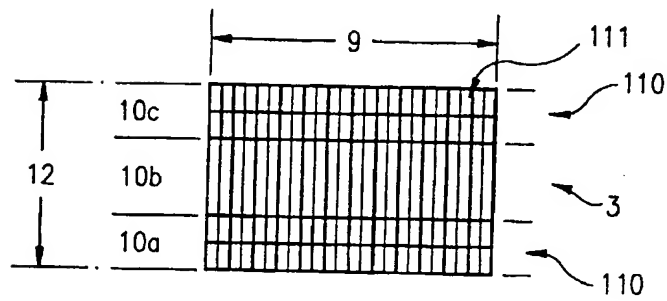


FIG. 32B




FIG. 32C

15/22

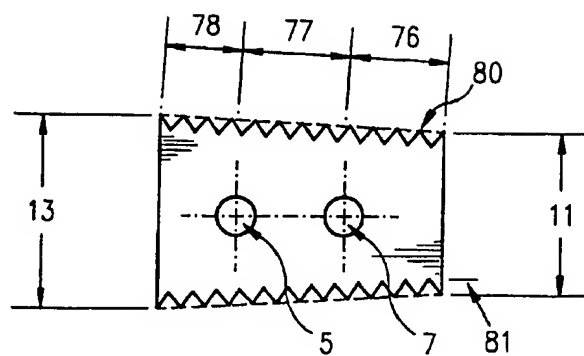


FIG. 33A

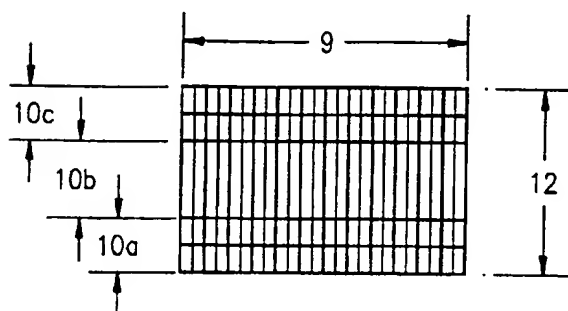


FIG. 33B




FIG. 33C

16/22

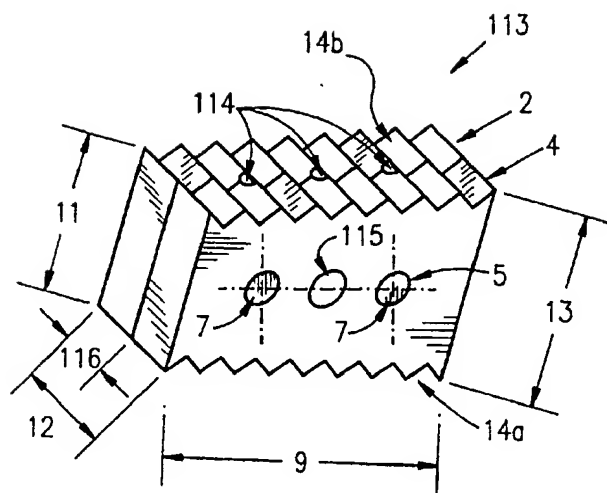


FIG. 34

17/22

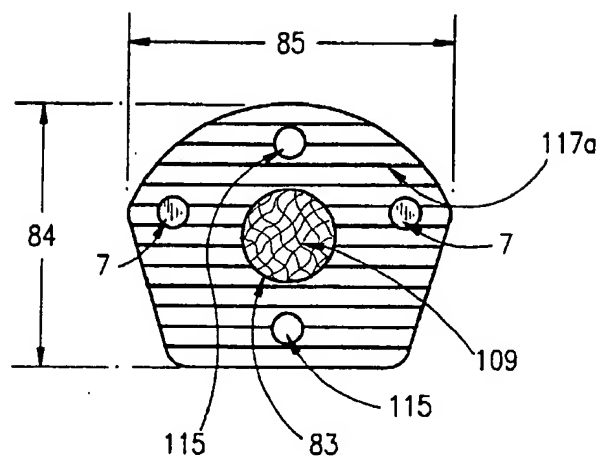


FIG. 35A

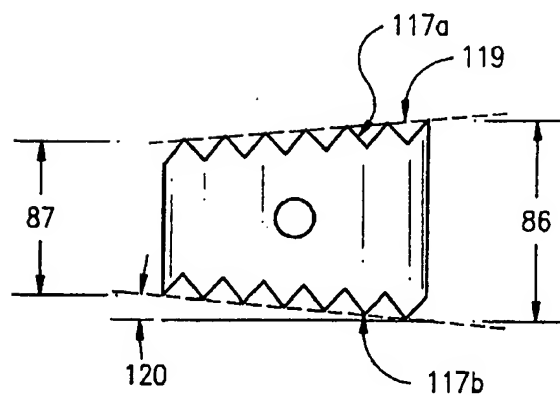


FIG. 35B

18/22

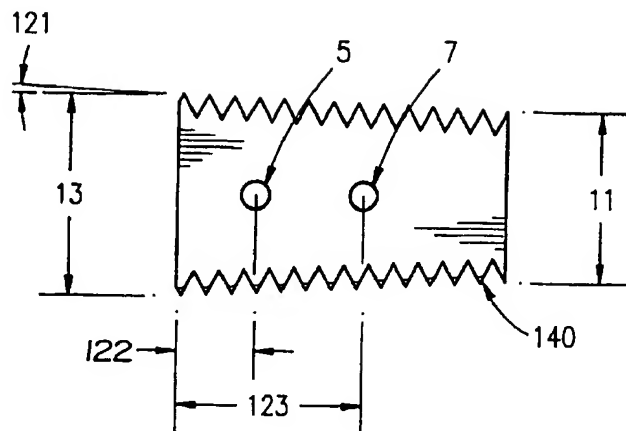


FIG. 36A

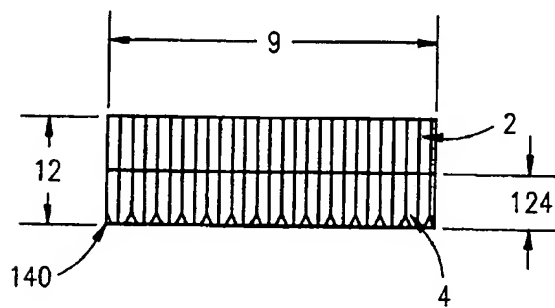


FIG. 36B

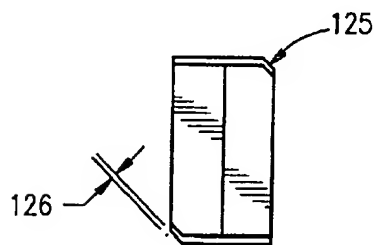


FIG. 36C

19/22

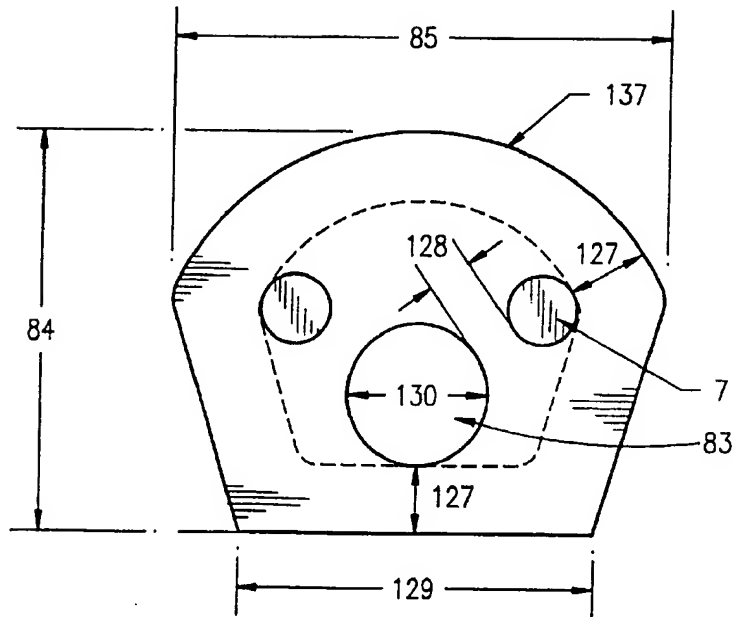


FIG. 37

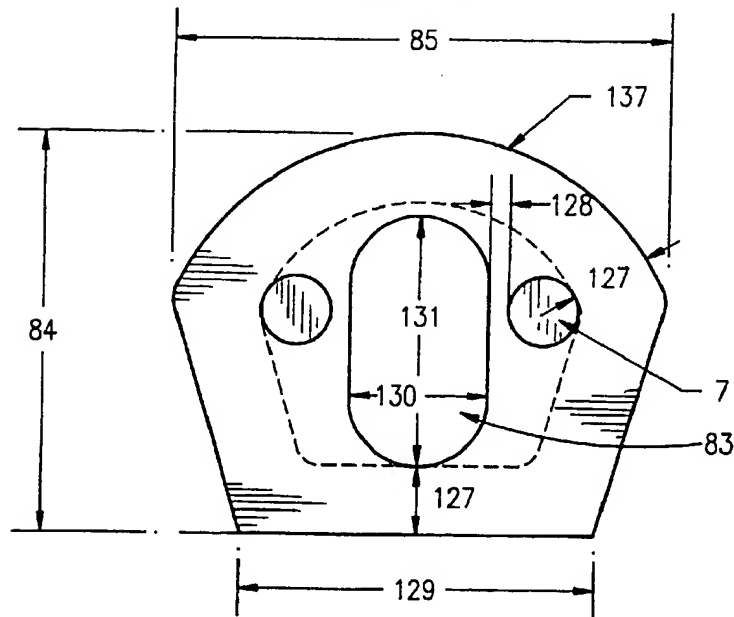


FIG. 38

20/22

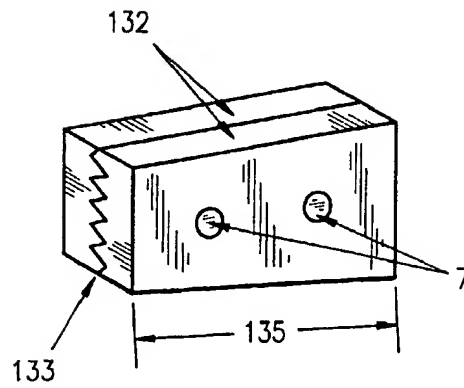


FIG. 39

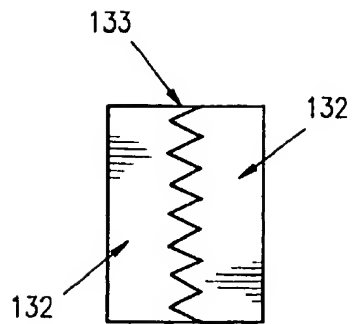


FIG. 40A

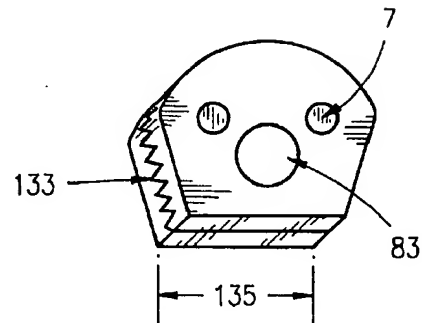


FIG. 40B

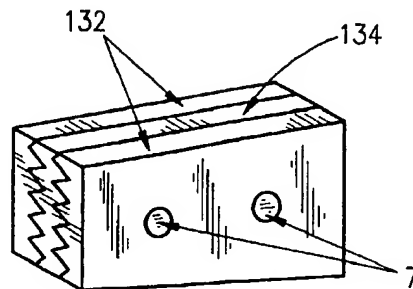


FIG. 41

21/22

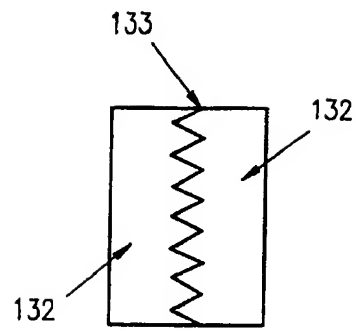


FIG. 42A




FIG. 42B

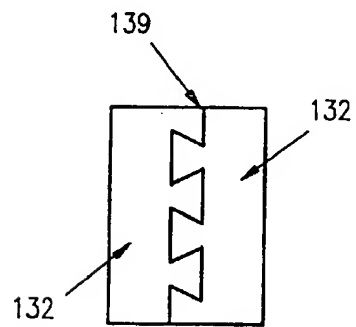


FIG. 42C

22/22

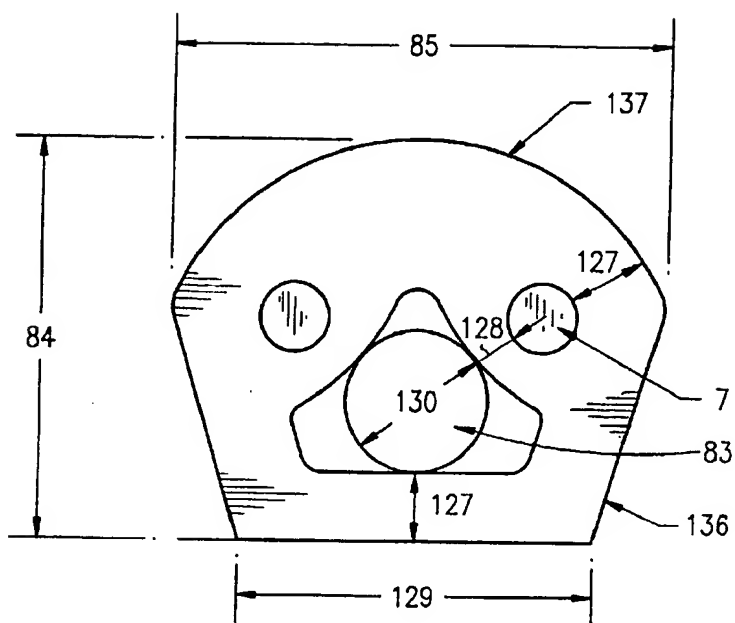


FIG. 43

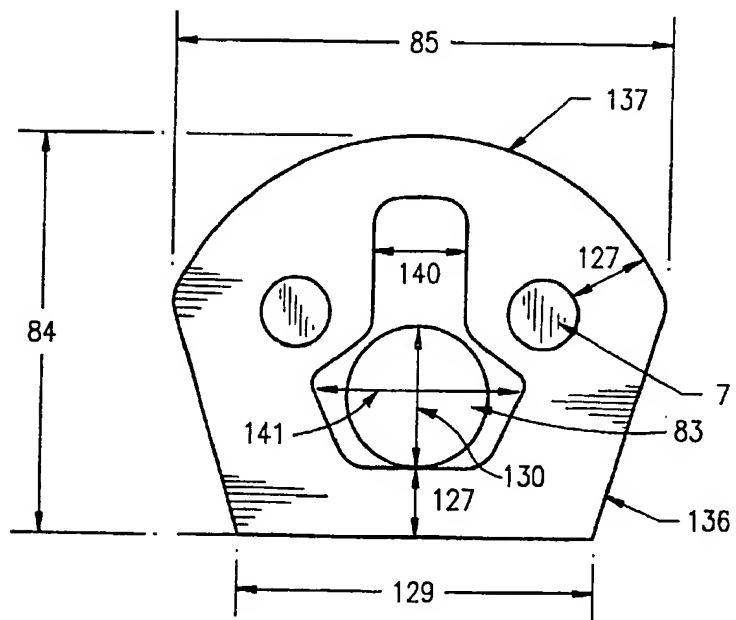


FIG. 44

SUBSTITUTE SHEET (RULE 26)